
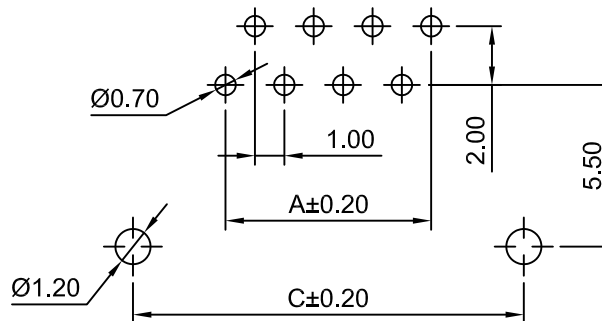
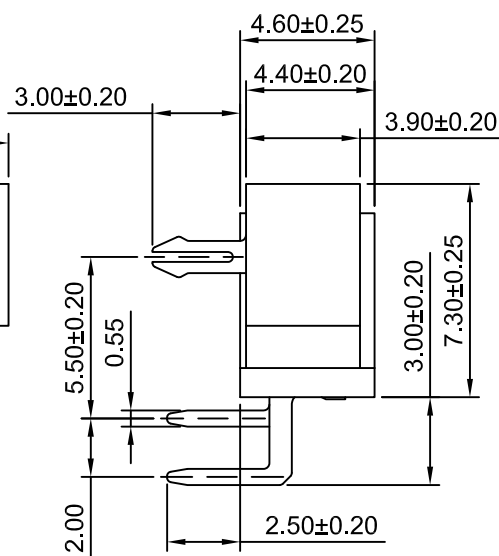
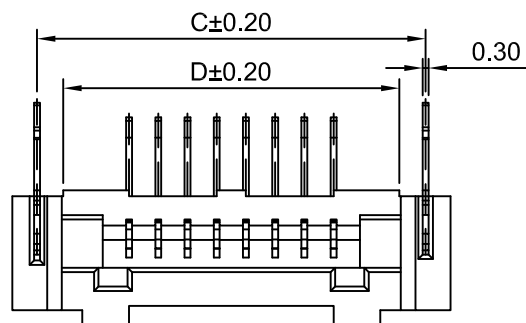
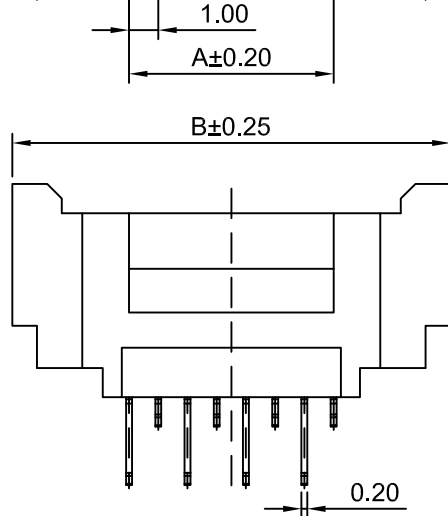


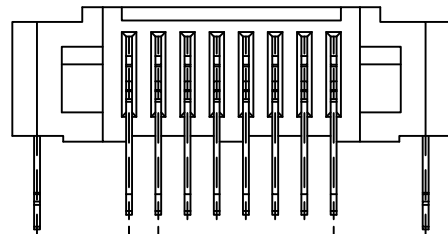

P.C.B LAYOUT

Ordering Information:

A1002WRJ-F-XP - *
1 2


1.Part No.

2.Color:

(blank):Black

BG:Beige

WH:White

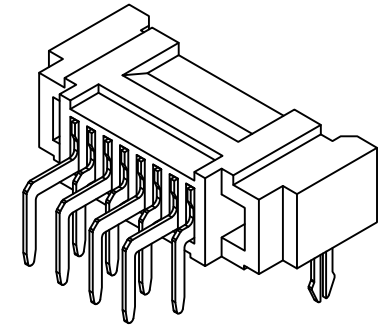

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 150V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Solder Tabs: Phosphor Bronze/Tin over Nickel

Material:LCP,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)				Circuits	Dimensions(mm)			
	A	B	C	D		A	B	C	D
4P	3.00	11.00	9.30	7.50	13P	12.00	20.00	18.30	16.50
5P	4.00	12.00	10.30	8.50	14P	13.00	21.00	19.30	17.50
6P	5.00	13.00	11.30	9.50	15P	14.00	22.00	20.30	18.50
7P	6.00	14.00	12.30	10.50	16P	15.00	23.00	21.30	19.50
8P	7.00	15.00	13.30	11.50	17P	16.00	24.00	22.30	20.50
9P	8.00	16.00	14.30	12.50	18P	17.00	25.00	23.30	21.50
10P	9.00	17.00	15.30	13.50	19P	18.00	26.00	24.30	22.50
11P	10.00	18.00	16.30	14.50	20P	19.00	27.00	25.30	23.50
12P	11.00	19.00	17.30	15.50	30P	29.00	37.00	35.30	33.50

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit Scale Sheet
mm 4:1 1 of 1

Draw BY: Tony Su
Approved: Jack Yin

General Tolerance

x.x±0.25
x.xx±0.20
x.xxx±0.15

ANGLE±
⊕ ⊖

Title :
1.00mm PITCH

90° Wafer

DRAW NO : A1002WRJ-F-XP

REV
A0

A0	NEW RELEASE	2016.08.03
REV	DESCRIPTION	DATE