


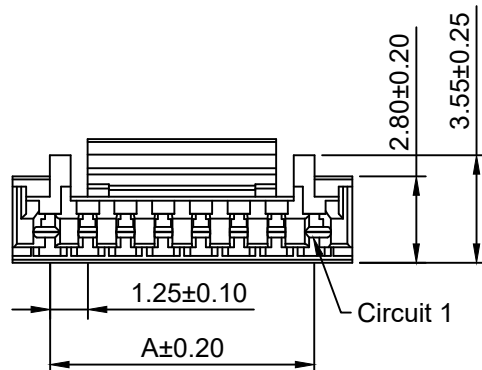





7P~15P

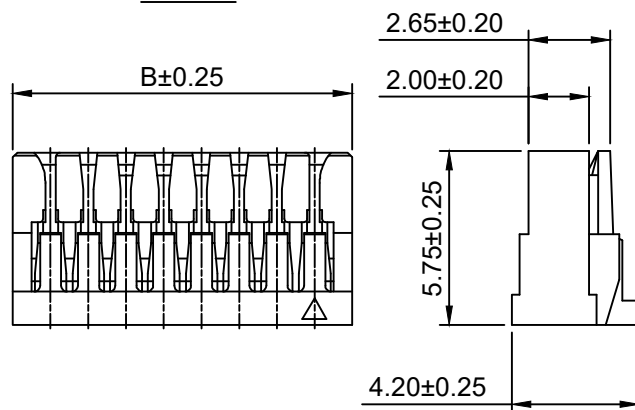

5P

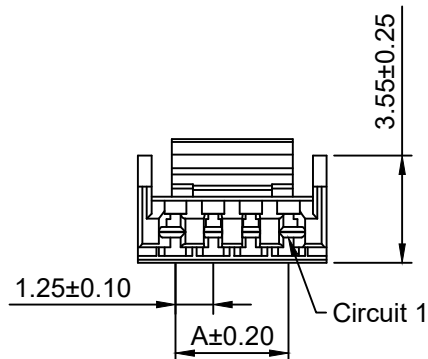

2P~4P,6P

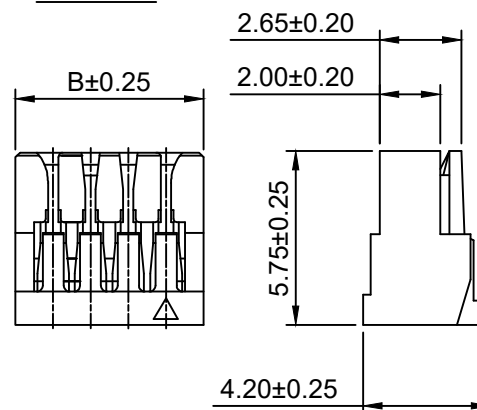

Ordering Information:

A1257H-XP - *** - **
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

PBT: PBT,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),


IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank): White

RD: Red



SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1257H-2P	1.25	3.75
A1257H-3P	2.50	5.00
A1257H-4P	3.75	6.25
A1257H-5P	5.00	7.50
A1257H-6P	6.25	8.75
A1257H-7P	7.50	10.00
A1257H-8P	8.75	11.25
A1257H-9P	10.00	12.50
A1257H-10P	11.25	13.75
A1257H-11P	12.50	15.00
A1257H-12P	13.75	16.25
A1257H-13P	15.00	17.50
A1257H-14P	16.25	18.75
A1257H-15P	17.50	20.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2021.04.29
A4	CHANGE THE DRAWING	2019.04.02
A3	CHANGE THE DRAWING	2018.11.09
A2	CHANGE THE DRAWING	2018.05.08
A1	CHANGE THE DRAWING	2017.09.24
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE

Unit	Scale	Sheet	TITLE 1.25mm PITCH HOUSING ULTRA LOW PROFILE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			A1257H-XP	A5