


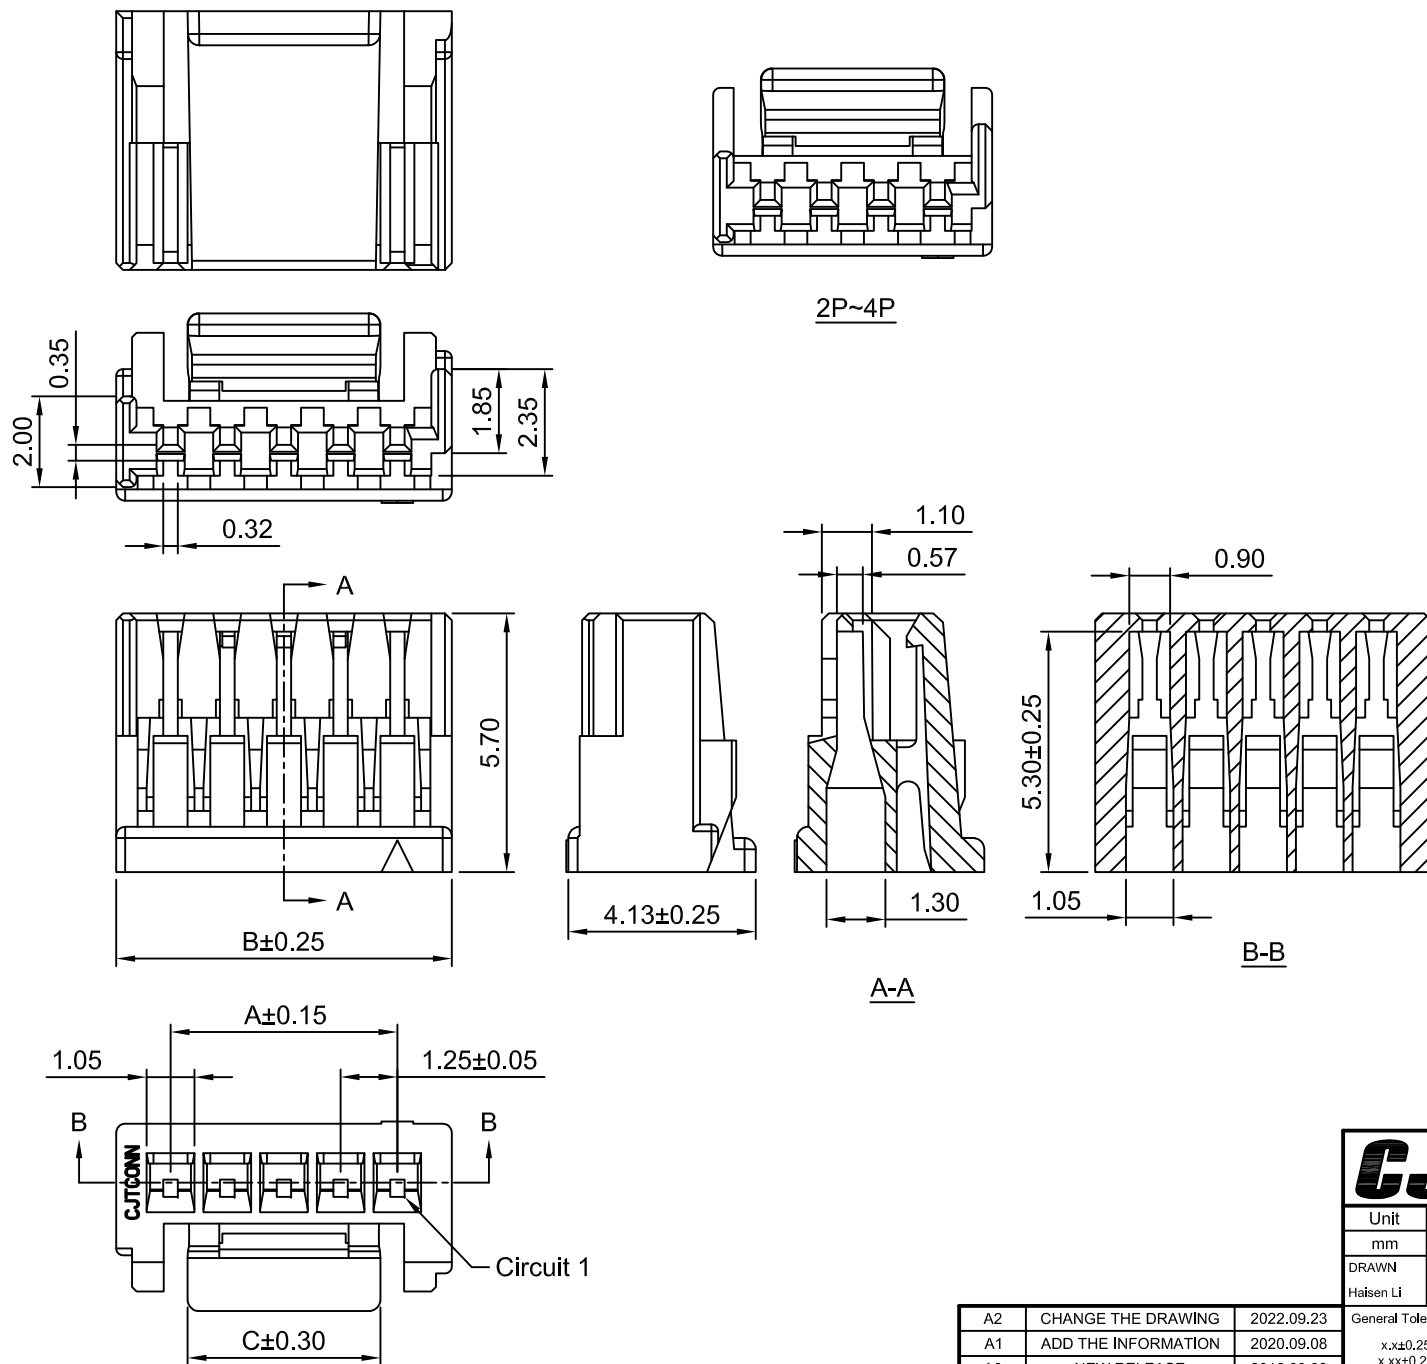

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0(Pink)

Ordering Information & Dimensions

Part No.	Dimensions(mm)		
	A	B	C
A1257HP-2P-PBT	1.25	3.65	2.10
A1257HP-3P-PBT	2.50	4.90	3.00
A1257HP-4P-PBT	3.75	6.15	4.05
A1257HP-5P-PBT	5.00	7.40	4.25
A1257HP-6P-PBT	6.25	8.65	6.25
A1257HP-7P-PBT	7.50	9.90	6.25
A1257HP-8P-PBT	8.75	11.15	6.25
A1257HP-9P-PBT	10.00	12.40	6.25
A1257HP-10P-PBT	11.25	13.65	8.20
A1257HP-11P-PBT	12.50	14.90	8.20
A1257HP-12P-PBT	13.75	16.15	8.20
A1257HP-13P-PBT	15.00	17.40	8.20
A1257HP-14P-PBT	16.25	18.65	8.20
A1257HP-15P-PBT	17.50	19.90	8.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	1.25mm PITCH HOUSING	
DRAWN	CHK	APVD		
Haisen Li	DianKui Wan	Jack Yin	DRAWING NO	REV
General Tolerance			A1257HP-XP-PBT	A2
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			THIRD ANGLE PROJECTION	

A2	CHANGE THE DRAWING	2022.09.23
A1	ADD THE INFORMATION	2020.09.08
A0	NEW RELEASE	2016.09.08
REV	DESCRIPTION	DATE