

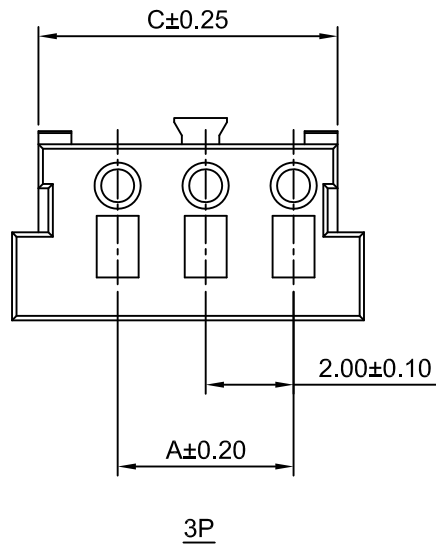


2P

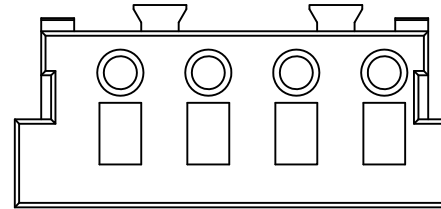

4P~16P





SPECIFICATIONS:

Current Rating: 4A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: 10m Ω Max.
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	6.00	4.80	10P	18.00	22.00	20.80
3P	4.00	8.00	6.80	11P	20.00	24.00	22.80
4P	6.00	10.00	8.80	12P	22.00	26.00	24.80
5P	8.00	12.00	10.80	13P	24.00	28.00	26.80
6P	10.00	14.00	12.80	14P	26.00	30.00	28.80
7P	12.00	16.00	14.80	15P	28.00	32.00	30.80
8P	14.00	18.00	16.80	16P	30.00	34.00	32.80
9P	16.00	20.00	18.80				

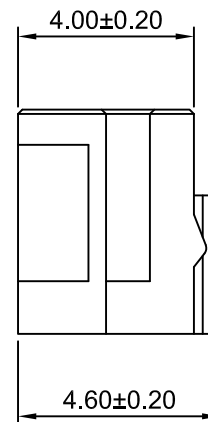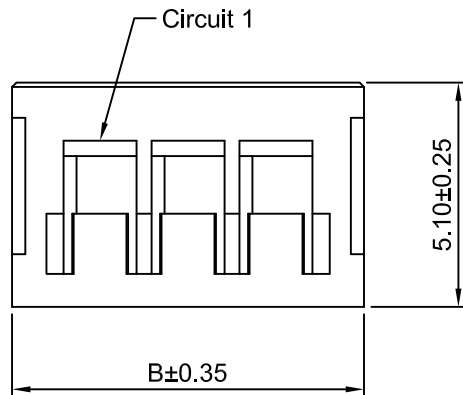

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	6:1	1 of 1
Draw By:		Approved :
Dlankul Wan		Jack Yln

Title :		2.00mm Pitch	
		Housing	
DRAW NO :		A2007H-XP	REV A2

A2	CHANGE THE TOLERANCE SIZE B&C	2019.05.09	General Tolerance	
A1	ADD THE DRAWING OF 4P~16P	2019.05.09	x.xx±0.25	PROJECT
A0	NEW RELEASE	2005.05.10	x.xx±0.20	
REV	DESCRIPTION	DATE	x.xxx±0.15	