
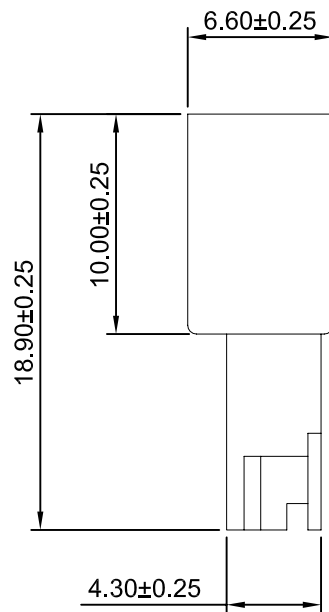
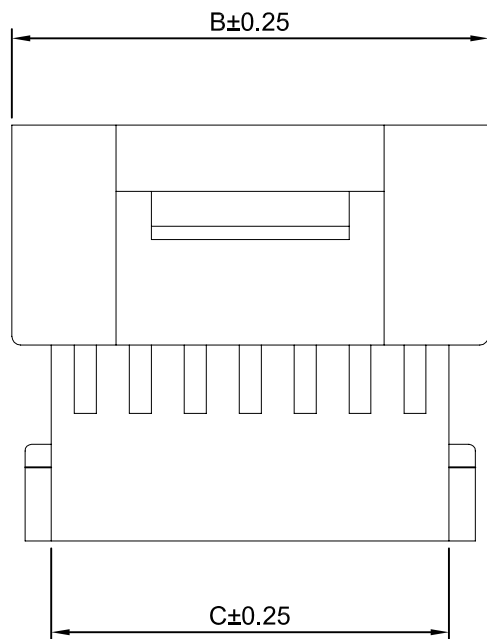


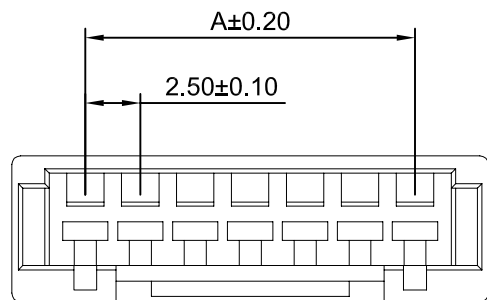

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 500V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max
Insulation Resistance: 500MΩ Min
Withstanding Voltage: 1000V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.50	9.20	5.60	9P	20.00	26.70	23.10
3P	5.00	11.70	8.10	10P	22.50	29.20	25.60
4P	7.50	14.20	10.60	11P	25.00	31.70	28.10
5P	10.00	16.70	13.10	12P	27.50	34.20	30.60
6P	12.50	19.20	15.60	13P	30.00	36.70	33.10
7P	15.00	21.70	18.10	14P	32.50	39.20	35.60
8P	17.50	24.20	20.60	15P	35.00	41.70	38.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :
2.50mm PITCH

Housing

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

DRAW NO : **A2512HMA-XP**

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2017.10.27