


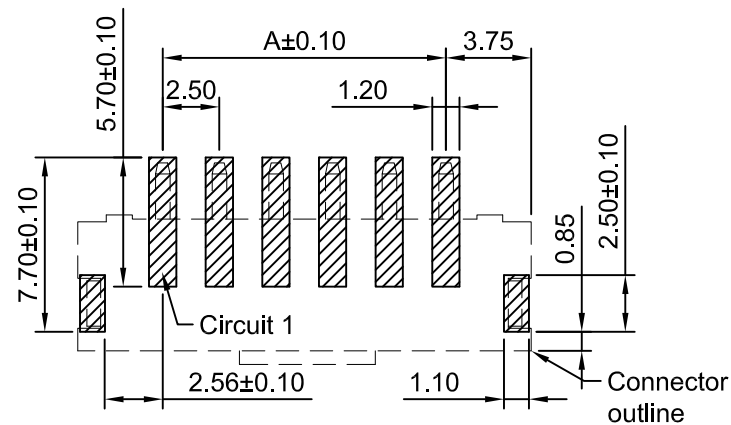
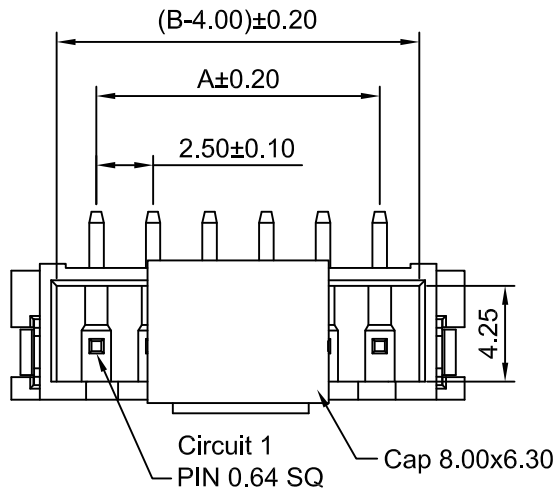


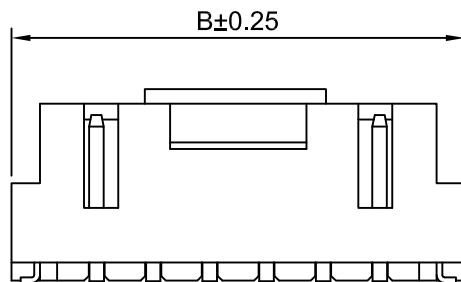

P.C.B LAYOUT
TOLERANCE:±0.05



3P~16P

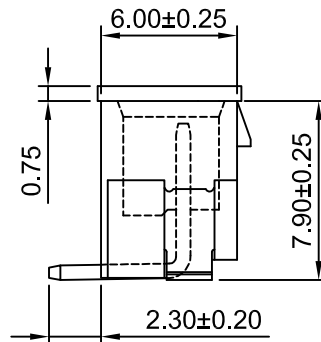

Ordering Information:

A2512WV-S-XP - ***
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u"Mating area)

G3: Gold over Nickel (Au:3u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)

G30: Gold over Nickel (Au:30u"Mating area)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -25°C ~ +105°C

Contact Resistance: 20mΩ Max

Insulation Resistance:1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Phosphor Bronze

Material: LCP,UL94V-0 (Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2512WV-S-2P	2.50	10.00
A2512WV-S-3P	5.00	12.50
A2512WV-S-4P	7.50	15.00
A2512WV-S-5P	10.00	17.50
A2512WV-S-6P	12.50	20.00
A2512WV-S-7P	15.00	22.50
A2512WV-S-8P	17.50	25.00
A2512WV-S-9P	20.00	27.50
A2512WV-S-10P	22.50	30.00
A2512WV-S-11P	25.00	32.50
A2512WV-S-12P	27.50	35.00
A2512WV-S-13P	30.00	37.50
A2512WV-S-14P	32.50	40.00
A2512WV-S-15P	35.00	42.50
A2512WV-S-16P	37.50	45.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.50mm PITCH VERTICAL WAFER - SMD TYPE	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			A2512WV-S-XP	A1

A1	MODIFY DRAWING	2020.05.13
A0	NEW RELEASE	2011.05.13
REV	DESCRIPTION	DATE