
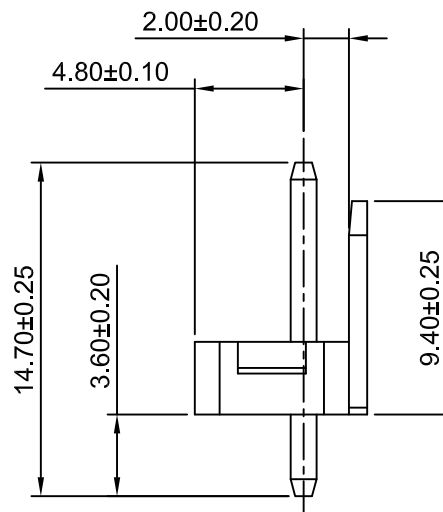
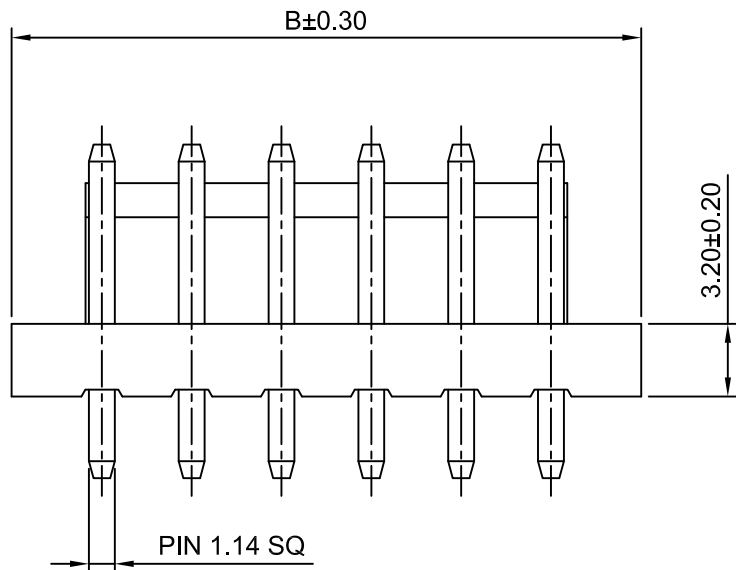



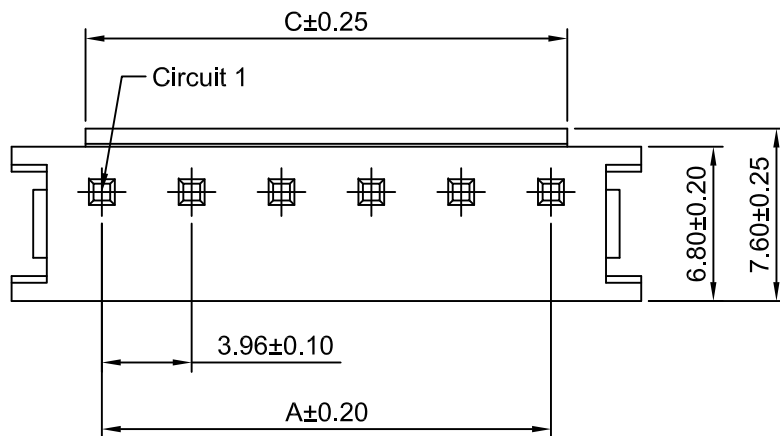

Ordering Information:

A3963WVB-XP - *** _ ***
1 2 3

1.Part No.

2.Material:


(blank) - Nylon 66,UL94V-0

GWT - Nylon 66,UL94V-0,GWT 750℃

3.Finish:

(blank) - Tin over Nickel

G - Gold over Nickel



SPECIFICATIONS:

Current Rating: 10A AC,DC(AWG #16)

Voltage Rating: 250V AC,DC

Temperature Range: -40℃ ~ +105℃

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A3963WVB-2P	3.96	11.92	5.40
A3963WVB-3P	7.92	15.88	9.36
A3963WVB-4P	11.88	19.84	13.32
A3963WVB-5P	15.84	23.80	17.28
A3963WVB-6P	19.80	27.76	21.24
A3963WVB-7P	23.76	31.72	25.20
A3963WVB-8P	27.72	35.68	29.16
A3963WVB-9P	31.68	39.64	33.12
A3963WVB-10P	35.64	43.60	37.08
A3963WVB-11P	39.60	47.56	41.04
A3963WVB-12P	43.56	51.52	45.00
A3963WVB-13P	47.52	55.48	48.96
A3963WVB-14P	51.48	59.44	52.92
A3963WVB-15P	55.44	63.40	56.88

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.