
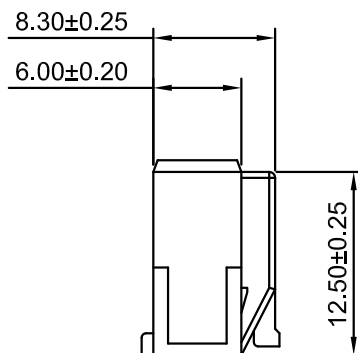
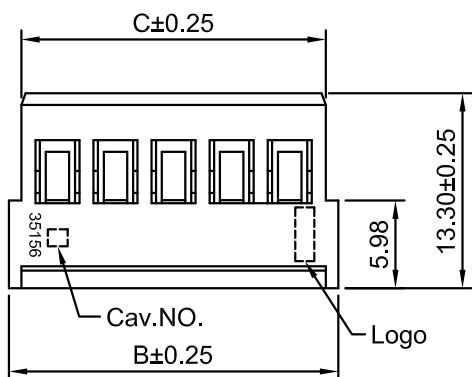
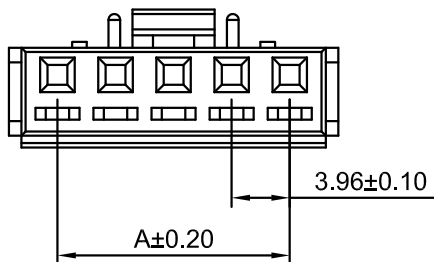


4P~8P

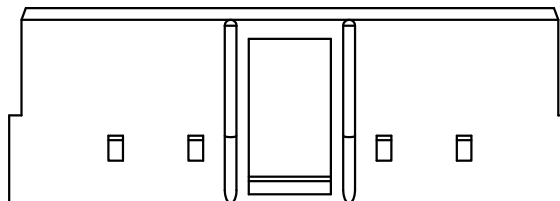

9P~15P

Ordering Information:

A3965HA-XP - ^{***}/₂

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),IEC 60335-1,5th Edition
Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 7A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	3.96	10.58	8.88	9P	31.68	38.30	36.60
3P	7.92	14.54	12.84	10P	35.64	42.26	40.56
4P	11.88	18.50	16.80	11P	39.60	46.22	44.52
5P	15.84	22.46	20.76	12P	43.56	50.18	48.48
6P	19.80	26.42	24.72	13P	47.52	54.14	52.44
7P	23.76	30.38	28.68	14P	51.48	58.10	56.40
8P	27.72	34.34	32.64	15P	55.44	62.06	60.36

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	2:1	1 of 1

Draw BY:	Approved :
Yinzhipeng	GONGYB

General Tolerance

x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :		3.96mm PITCH	
		HOUSING	
DRAW NO :		A3965HA-XP	REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEEASE	2014,04,21