







2P



3P

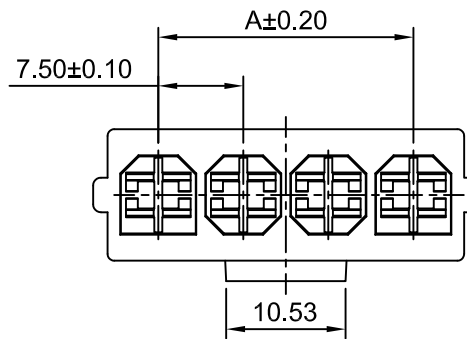

4P~6P

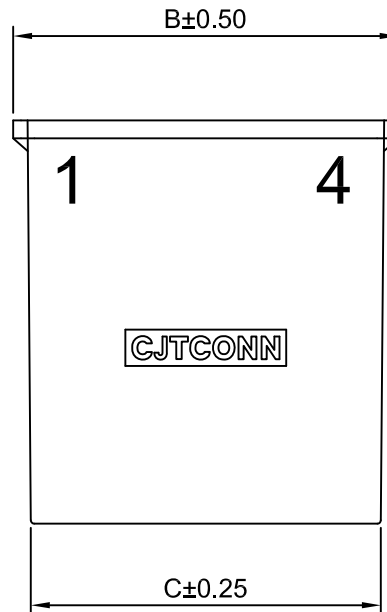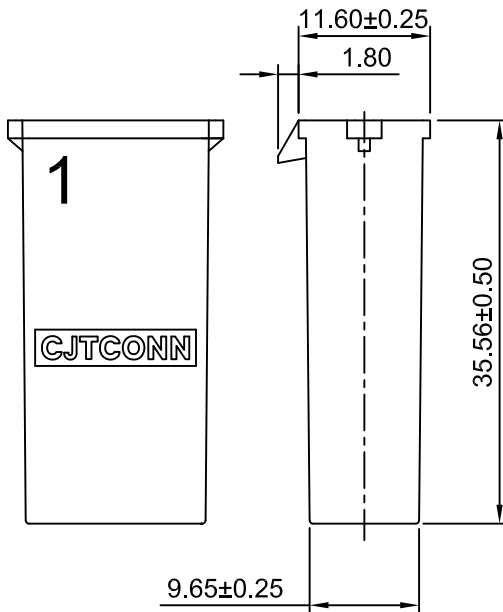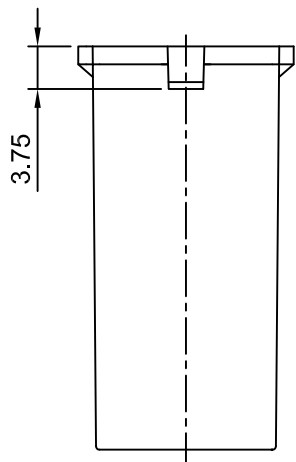

Ordering Information:

A7501HMA-XP - ***
1 2

1.Part No.

2.Material:

(Blank):Nylon 66,UL94V-0/Black

V2:Nylon 66,UL94V-2/Natural

GWT:Nylon 66,UL94V-0,GWT 750°C/Black

SPECIFICATIONS:

Current Rating: 34A AC,DC

Voltage Rating: 600V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1500V AC/minute

Material: Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
A7501HMA-2P	7.50	19.00	15.86
A7501HMA-3P	15.00	26.50	23.36
A7501HMA-4P	22.50	34.00	30.86
A7501HMA-5P	30.00	41.50	38.36
A7501HMA-6P	37.50	49.00	45.86

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1		
DRWN	CHK'D	APPR	7.50mm Pitch Receptacle Housing	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			A7501HMA-XP	A3

A3	CHANGE THE DRAWING	2021.06.01
A2	CHANGE THE DRAWING	2020.03.06
A1	CHANGE THE DRAWING	2019.12.18
A0	NEW RELEASE	2017.07.10
REV	DESCRIPTION	DATE