
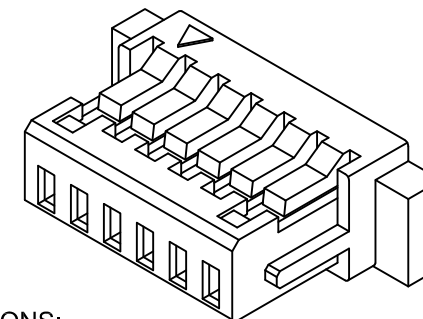
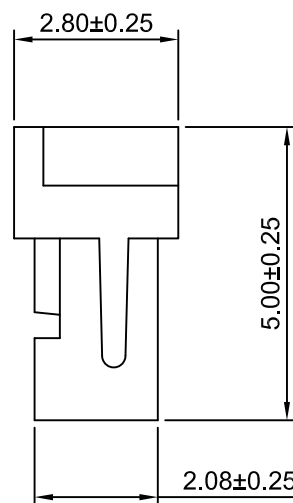
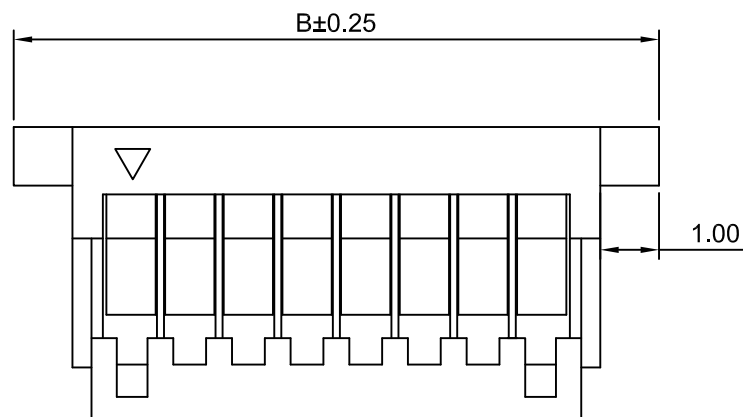


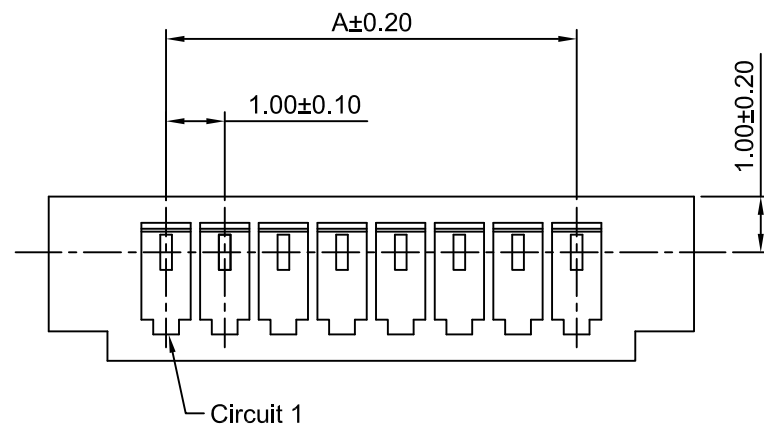

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max.
Insulation Resistance: $100\text{M}\Omega$ Min.
Withstanding Voltage: 500V AC/minute
Material: PBT,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.00	5.00	12P	11.00	15.00
3P	2.00	6.00	13P	12.00	16.00
4P	3.00	7.00	14P	13.00	17.00
5P	4.00	8.00	15P	14.00	18.00
6P	5.00	9.00	16P	15.00	19.00
7P	6.00	10.00	17P	16.00	20.00
8P	7.00	11.00	18P	17.00	21.00
9P	8.00	12.00	19P	18.00	22.00
10P	9.00	13.00	20P	19.00	23.00
11P	10.00	14.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	8:1	1 of 1

Draw By:	Approved :
Diankui Wan	Jack Yin

General Tolerance

x.x±0.25	PROJECT
x.xx±0.20	
x.xxx±0.15	

Title :	
1.00mm PITCH HUSING WITH PROTUSIONS	
DRAW NO :	A1002H-XP
REV	A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2005.05.10