
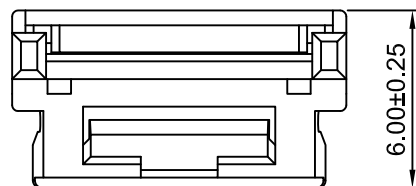
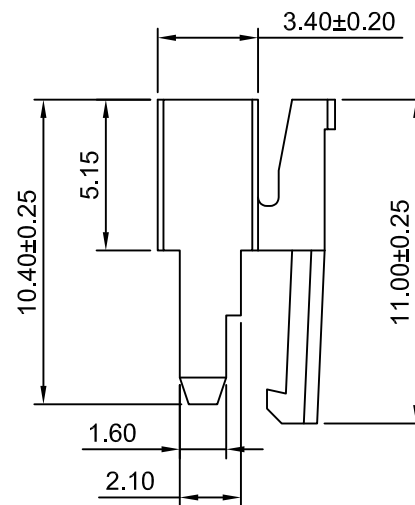


The FPC cable into
the schematic diagram

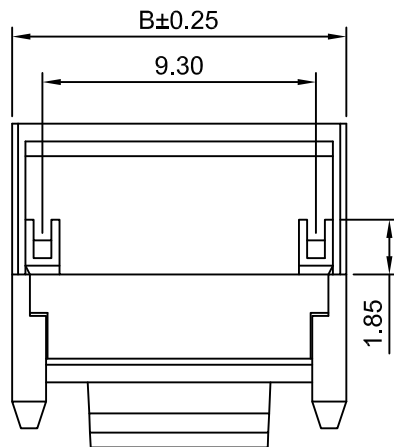

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 150V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Material:Nylon 66,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
4P	3.00	7.35	13P	12.00	16.35
5P	4.00	8.35	14P	13.00	17.35
6P	5.00	9.35	15P	14.00	18.35
7P	6.00	10.35	16P	15.00	19.35
8P	7.00	11.35	17P	16.00	20.35
9P	8.00	12.35	18P	17.00	21.35
10P	9.00	13.35	19P	18.00	22.35
11P	10.00	14.35	20P	19.00	23.35
12P	11.00	15.35	20P	29.00	33.35

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1

Draw BY:	Approved :
Tony Su	Jack Yin

General Tolerance

x.x±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	

Title :
1.00mm PITCH
HOUSING

DRAW NO : A1002HJ-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2016.08.03