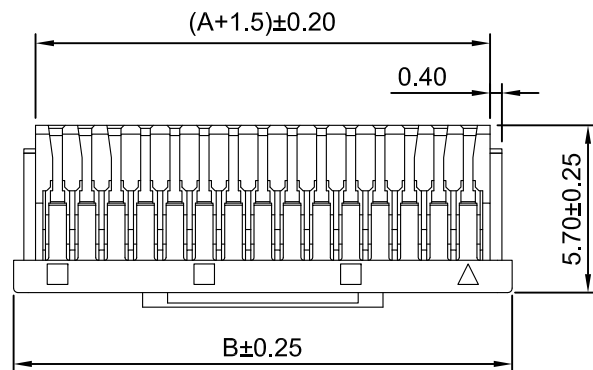
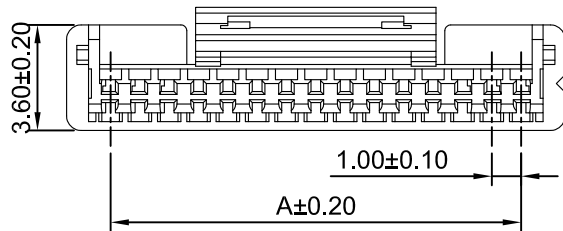


Ordering Information:

A1002HP-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): PBT,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Ivory),IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): see section 2 Material

IV: Ivory

BK: Black

BL: Blue


TR: Tomato red

MG: Moss green

DH: Dark gray

LE: Light blue

DPK: Dark pink



SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max


Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute



Ordering Information & Dimensions

Part NO	Dimensions (mm)		
	A	B	C
A1002HP-2P	2.00	5.00	2.20
A1002HP-3P	2.00	5.00	2.20
A1002HP-4P	3.00	6.00	2.20
A1002HP-5P	4.00	7.00	3.20
A1002HP-6P	5.00	8.00	4.20
A1002HP-7P	6.00	9.00	4.20
A1002HP-8P	7.00	10.00	4.20
A1002HP-9P	8.00	11.00	4.20
A1002HP-10P	9.00	12.00	6.20
A1002HP-11P	10.00	13.00	6.2
A1002HP-12P	11.00	14.00	6.20
A1002HP-13P	12.00	15.00	6.2
A1002HP-14P	13.00	16.00	8.20
A1002HP-15P	14.00	17.00	8.20



CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	4:1	1 of 2	1.00mm PITCH HOUSING
DRWN	CHK'D	APPR	
Chengbiao Ye	Diankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
			A1002HP-XP
			REV A1

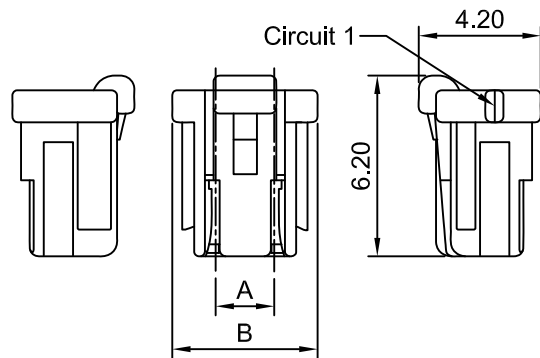



2P

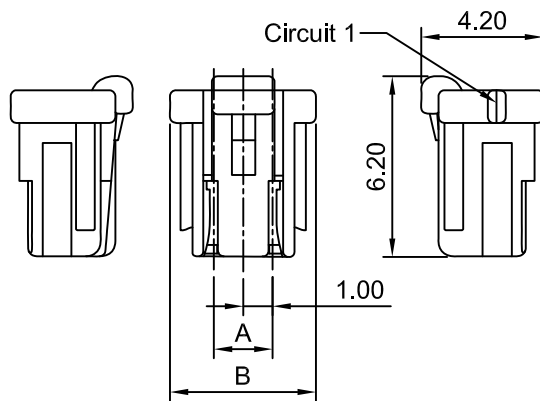


3P

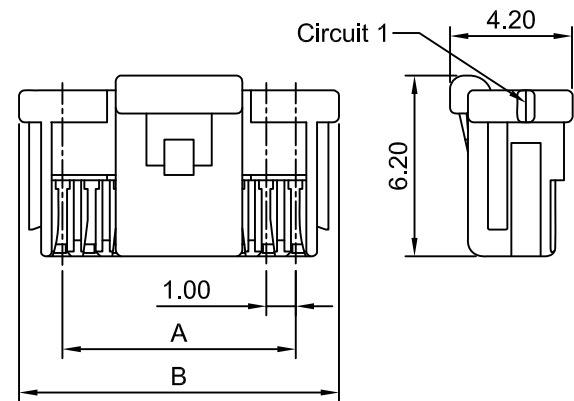

4P~9P

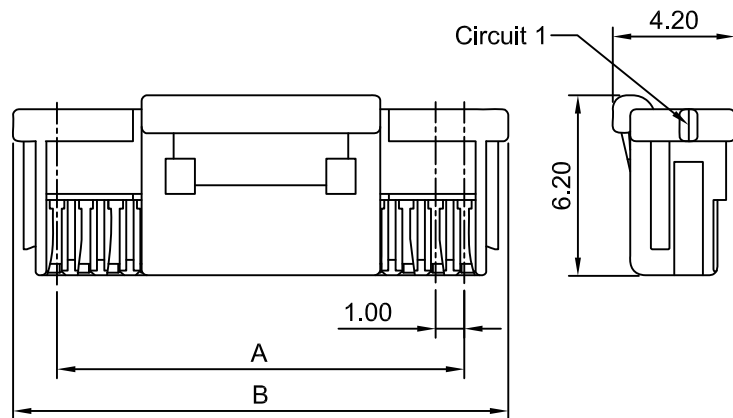

10P~15P

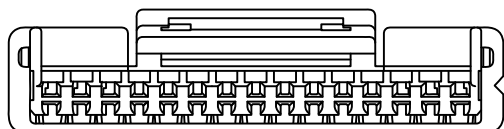

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	4:1	2 of 2	1.00mm PITCH HOUSING		
DRWN	CHK'D	APPR			
Chengbiao Ye	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.	
x.xx±0.25 x.xx±0.20 x.xx±0.15 ANGLES ±1°					
				A1002HP-XP	
				REV A1	