
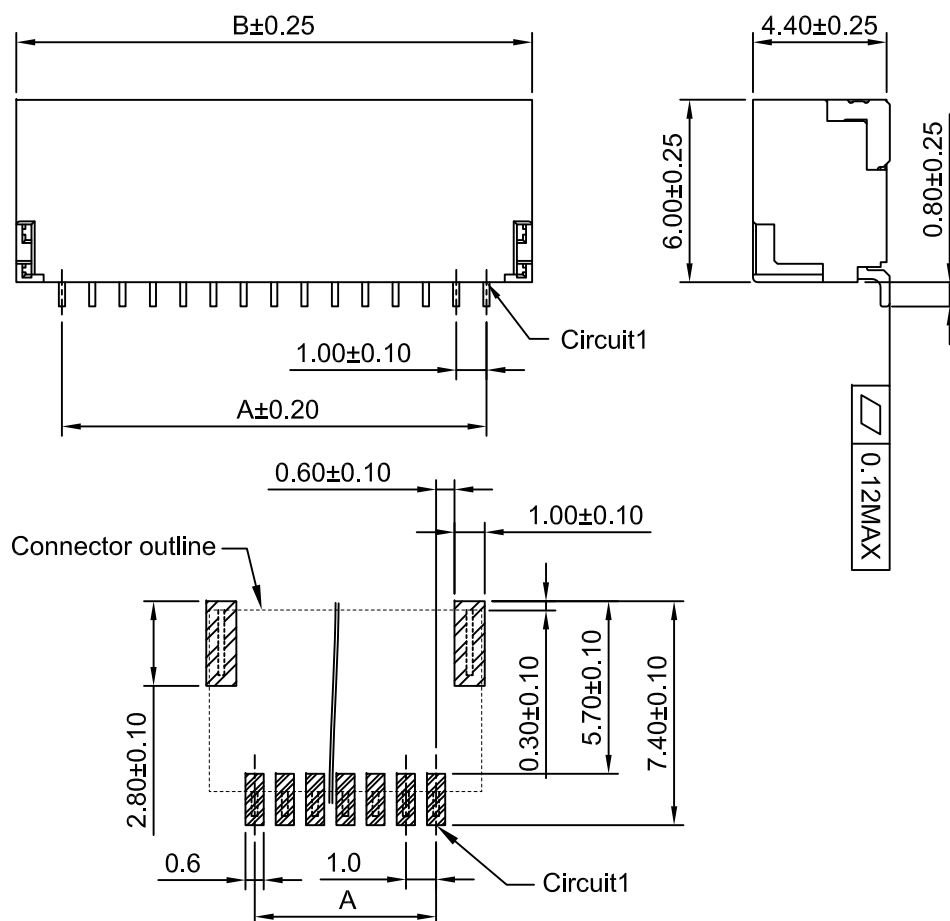



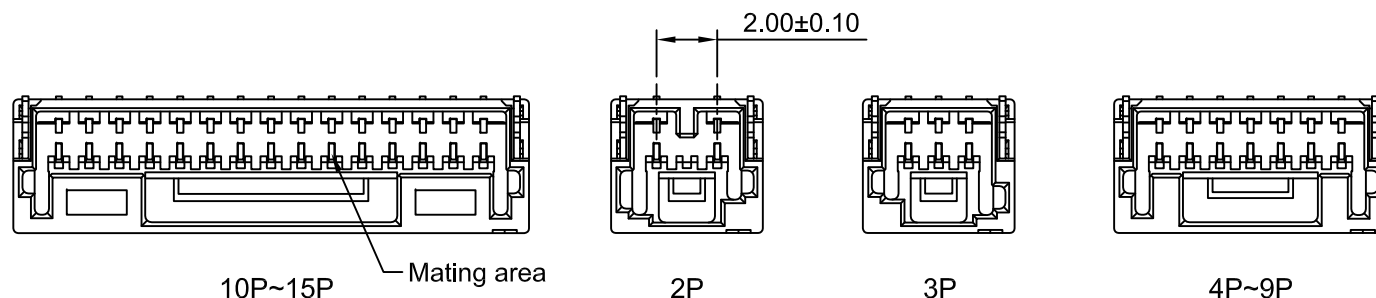

Ordering Information:

A1002WRP-S-XP - ** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): LCP,UL94V-0

9T: Nylon 9T,UL94V-0

3.Color:

(Blank): Ivory

DPK: Dark pink

BK:Black

BL:Blue

TR: Tomato red

MG: Moss green

DH: Dark

LE: Light blue

4.Finish:

(Blank): Tin over Nickel

G3: Gold over Nickel (Au:3u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)

G30: Gold over Nickel (Au:30u"Mating area)

SPECIFICATIONS:

Current Rating:1A AC,DC

Voltage Rating:50V AC/DC

Temperature Range:-40°C ~ +105°C

Contact Resistance:30mΩ Max.

Insulation Resistance:100MΩ Min.

Withstanding Voltage:500V AC/Minute

Pin Material:Phosphor Bronze

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1002WRP-S-2P	2.00	5.00
A1002WRP-S-3P	2.00	5.00
A1002WRP-S-4P	3.00	6.00
A1002WRP-S-5P	4.00	7.00
A1002WRP-S-6P	5.00	8.00
A1002WRP-S-7P	6.00	9.00
A1002WRP-S-8P	7.00	10.00
A1002WRP-S-9P	8.00	11.00
A1002WRP-S-10P	9.00	12.00
A1002WRP-S-11P	10.00	13.00
A1002WRP-S-12P	11.00	14.00
A1002WRP-S-13P	12.00	15.00
A1002WRP-S-14P	13.00	16.00
A1002WRP-S-15P	14.00	17.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.00mm PITCH RIGHT-ANGLE SINGLE ROW WAFER - SMT TYPE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO. A1002WRP-S-XP
x,x $\pm$ 0.25 x,x $\pm$ 0.20 x,x $\pm$ 0.15 ANGLES, $\pm$ 1°				
				REV A2

P.C.B LAYOUT(TOP VIEW)
TOLERANCE: $\pm$ 0.05

REV	DESCRIPTION	DATE
A2	MODIFY DRAWING	2022.01.03
A1	CHANGE THE DRAWING	2022.11.11
A0	NEW RELEASE	2021.12.09