
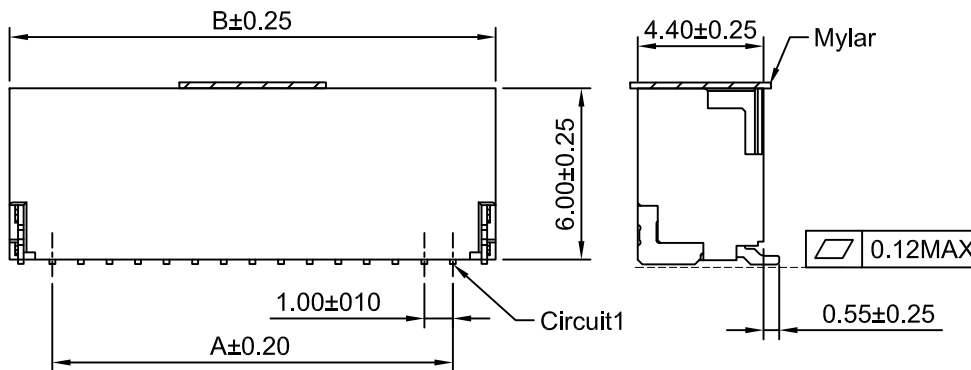
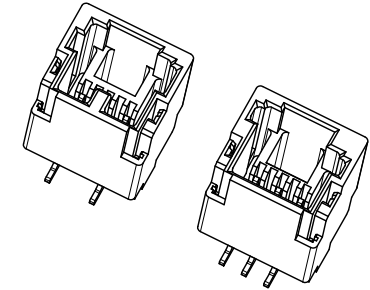


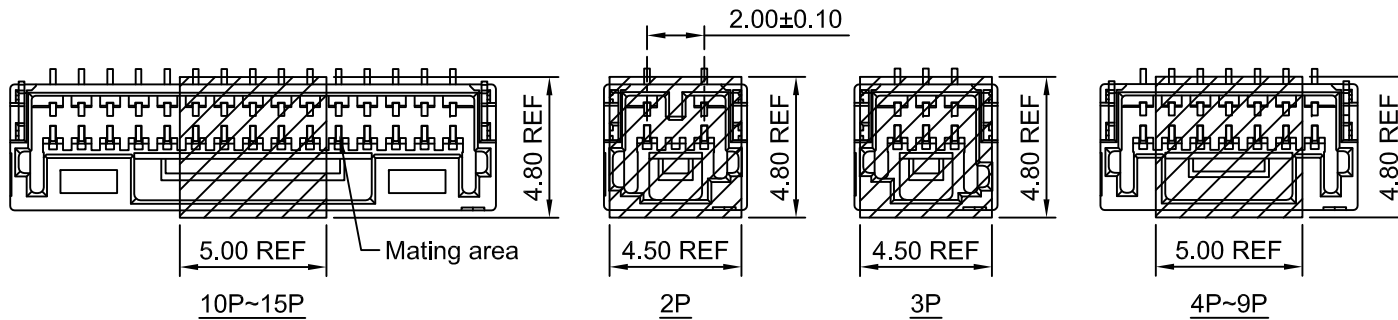

Ordering Information:
A1002WVP-S-XP - ** - *** - ***
1 2 3 4

1.Part NO.

2.Material:

(Blank): LCP,UL94V-0

9T: Nylon 9T,UL94V-0

3.Color:

(Blank): Ivory

DPK: Dark pink

BK:Black

BL:Blue

TR: Tomato red

MG: Moss green

DH: Dark

LE: Light blue

4.Finish:

(Blank): Tin over Nickel

G3: Gold over Nickel (Au:3u"Mating area)

G15: Gold over Nickel (Au:15u"Mating area)

G30: Gold over Nickel (Au:30u"Mating area)

SPECIFICATIONS:

Current Rating:1A AC,DC

Voltage Rating:50V AC/,DC

Temperature Range:-40°C ~ +105°C

Contact Resistance:30mΩ Max.

Insulation Resistance:100MΩ Min.


Withstanding Voltage:500V AC/Minute

Pin Material:Phosphor Bronze

Material:Nylon LCP UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1002WVP-S-2P	2.00	5.00
A1002WVP-S-3P	2.00	5.00
A1002WVP-S-4P	3.00	6.00
A1002WVP-S-5P	4.00	7.00
A1002WVP-S-6P	5.00	8.00
A1002WVP-S-7P	6.00	9.00
A1002WVP-S-8P	7.00	10.00
A1002WVP-S-9P	8.00	11.00
A1002WVP-S-10P	9.00	12.00
A1002WVP-S-11P	10.00	13.00
A1002WVP-S-12P	11.00	14.00
A1002WVP-S-13P	12.00	15.00
A1002WVP-S-14P	13.00	16.00
A1002WVP-S-15P	14.00	17.00

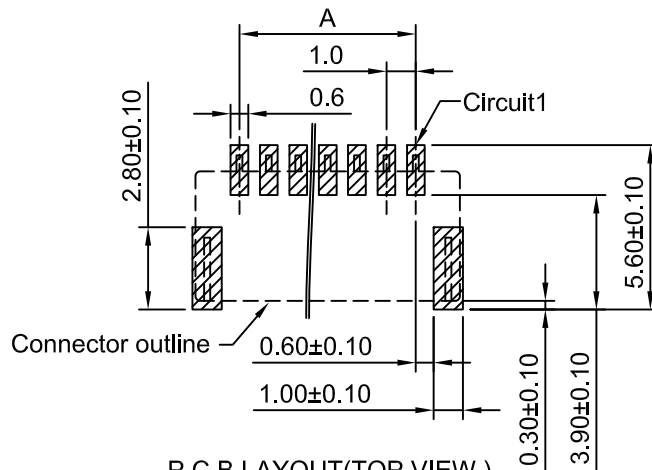

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	1.00mm PITCH VERTICAL SINGLE ROW WAFER - SMD TYPE	
DRWN	CHKD	APPR	DRAWING NO.	
Wenmin Luo	Diankui Wan	Jack Yin	A1002WVP-S-XP	
General Tolerances			THIRD ANGLE PROJECTION	
A2	MODIFY DRAWING	2022.12.06	x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°	
A1	CHANGE THE DRAWING	2022.11.11		
A0	NEW RELEASE	2021.12.09		
REV	DESCRIPTION	DATE		

REV
A2