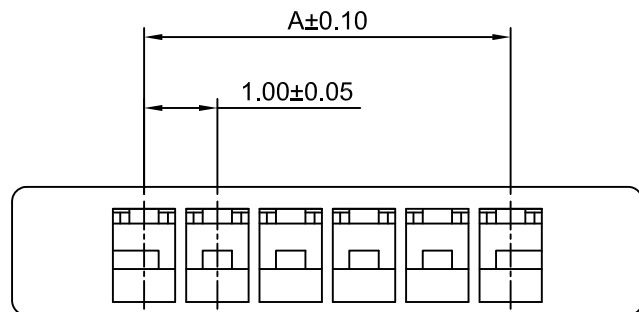
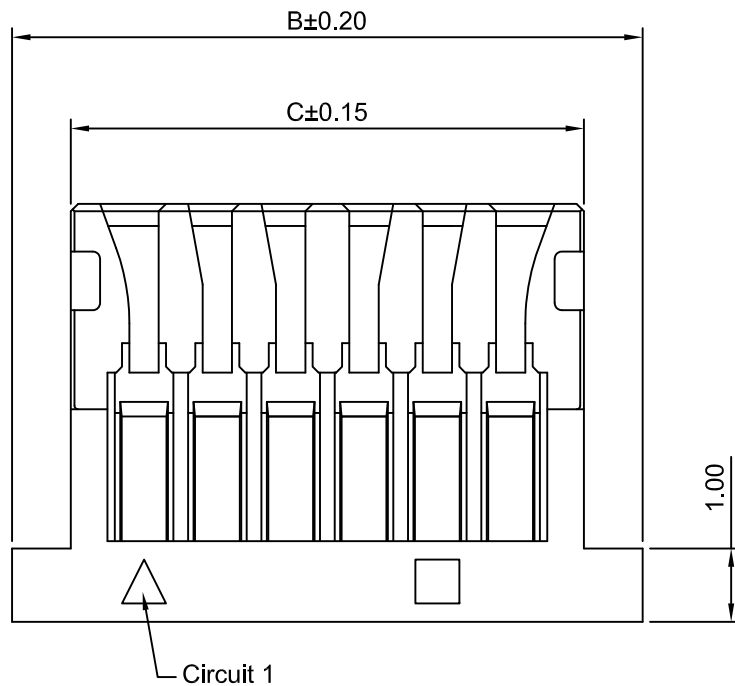


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 50V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66 UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.00	4.60	3.00	12P	11.00	14.60	13.00
3P	2.00	5.60	4.00	13P	12.00	15.60	14.00
4P	3.00	6.60	5.00	14P	13.00	16.60	15.00
5P	4.00	7.60	6.00	15P	14.00	17.60	16.00
6P	5.00	8.60	7.00	16P	15.00	18.60	17.00
7P	6.00	9.60	8.00	20P	19.00	22.60	21.00
8P	7.00	10.60	9.00	22P	21.00	24.60	23.00
9P	8.00	11.60	10.00	26P	25.00	28.60	27.00
10P	9.00	12.60	11.00	30P	29.00	32.60	31.00
11P	10.00	13.60	12.00				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	10:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

1.00mm PITCH

Single Row Housing

DRAW NO : A1006H-XP

REV
A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2012.07.06

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xxx±0.15	