

Ordering Information:

A1272WVF-2xXP - ***

1.Part No.

2.Finish:

(Blank): Gold over Nickel


G5: Gold over Nickel(Au:5u")

G10: Gold over Nickel(Au:10u")


G15: Gold over Nickel(Au:15u")

G30: Gold over Nickel(Au:30u")

T: Tin over Nickel



30P.50P

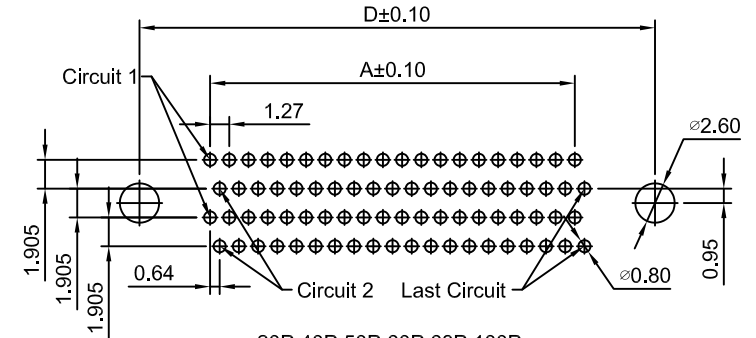

20P.40P.50P.60P.68P.100P

PCB LAYOUT
TOLERANCE: ± 0.05

SPECIFICATIONS:

Current rating: 1A AC,DC

Voltage rating: 30V AC,DC

Temperature range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact resistance: 35m Ω Max.

Insulation resistance: 500M Ω Min.

Withstanding voltage: 500V AC/minute

Pin Material: Phosphor/Gold over Nickel

Housing Material: LCP,UL94V-0(Black)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A1272WVF-2x10P	11.43	24.05	16.97	21.40
A1272WVF-2x15P	17.78	30.40	23.32	27.75
A1272WVF-2x20P	24.13	36.75	29.67	34.10
A1272WVF-2x25P	30.48	43.10	36.02	40.45
A1272WVF-2x30P	36.83	49.45	42.37	46.80
A1272WVF-2x34P	41.91	54.53	47.45	51.88
A1272WVF-2x40P	49.53	62.13	55.07	59.50
A1272WVF-2x50P	62.23	74.85	67.77	72.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		Title : 1.27mm Pitch SCSI 180° DIP Female Type			
mm		2:1		1 of 4					
Draw By:			Approved :						
Diankui Wan			Jack Yin						
General Tolerance									
x.x±0.25 x.xx±0.20 x.xxx±0.15		PROJECT 				DRAW NO : A1272WVF-2xXP		REV A0	

