
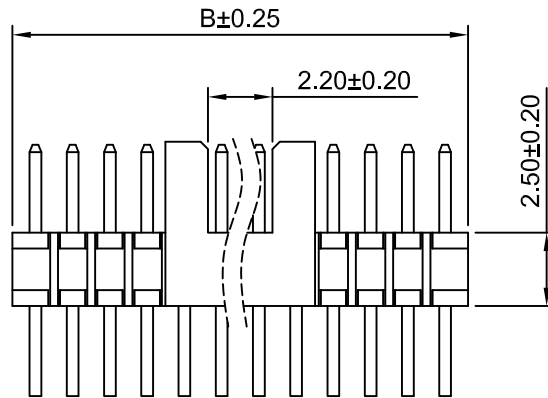
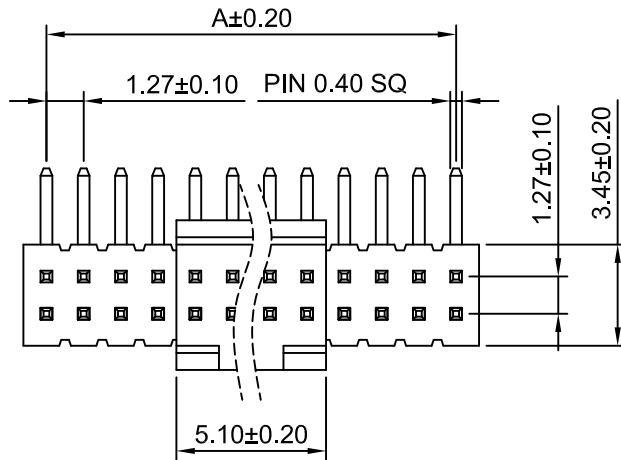


PCB LAYOUT
TOLERANCE:±0.05

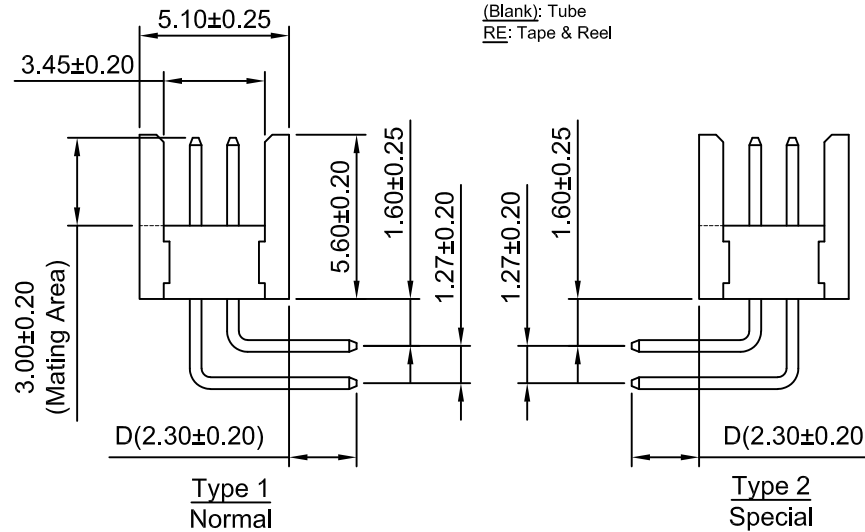

Ordering Information:

A1276WRK-2xXP - ^{**}1- ^{***}2- ^{***}3- ^{***}4- ^{***}5- ^{***}6- ^{***}7

1.Part NO.

2.Style:

(Blank):Type 1(Normal)

2:Type 2(Special)

3.Material

(Blank): LCP+30%GF,UL94V-0

9T: Nylon 9T,UL94V-0

4.Color

(Blank): Black GY: Gray

WH: White BL: Blue

5.Finish:

(Blank):Gold over Nickel(Au:1u",all area)

GT10:Gold over Nickel(Au:10u",Mating Area)

GT15:Gold over Nickel(Au:15u",Mating Area)

GT30:Gold over Nickel(Au:30u",Mating Area)

6.Size D:

(Blank): 2.30mm

D320: 3.20mm

7.Packing:

(Blank): Tube

RE: Tape & Reel

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 40mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass

Ordering Information & Dimensions

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	A	B		A	B
2x5P	5.08	6.65	2x29P	35.56	37.13
2x6P	6.35	7.92	2x30P	36.83	38.40
2x7P	7.62	9.19	2x31P	38.10	39.67
2x8P	8.89	10.46	2x32P	39.37	40.94
2x9P	10.16	11.73	2x33P	40.64	42.21
2x10P	11.43	13.00	2x34P	41.91	43.48
2x11P	12.70	14.27	2x35P	43.18	44.75
2x12P	13.97	15.54	2x36P	44.45	46.02
2x13P	15.24	16.81	2x36P	44.45	46.02
2x14P	16.51	18.08	2x37P	45.72	47.29
2x15P	17.78	19.35	2x38P	46.99	48.56
2x16P	19.05	20.62	2x39P	48.26	49.83
2x17P	20.32	21.89	2x40P	49.53	51.10
2x18P	21.59	23.16	2x41P	50.80	52.37
2x19P	22.86	24.43	2x42P	52.07	53.64
2x20P	24.13	25.70	2x43P	53.34	54.91
2x21P	25.40	26.97	2x44P	54.61	56.18
2x22P	26.67	28.24	2x45P	55.88	57.45
2x23P	27.94	29.51	2x46P	57.15	58.72
2x24P	29.21	30.78	2x47P	58.42	59.99
2x25P	30.48	32.05	2x48P	59.69	61.26
2x26P	31.75	33.32	2x49P	60.96	62.53
2x27P	33.02	34.59	2x50P	62.23	63.80
2x28P	34.29	35.86			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	1.27mm PITCH RIGHT-ANGLE DUAL ROW DIP WAFER	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1276WRK-2xXP	REV A0
x.xxx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				

A2	MODIFY DRAWING	2021.07.02
A1	CHANGE THE DRAWING	2020.07.24
A0	NEW RELEASE	2015.10.24
REV	DESCRIPTION	DATE