




Ordering Information:

A1501H-XP - ***
1 2

1.Part NO.

2. Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1, 5th Edition

Glow Wire Capable.

SPECIFICATIONS:

Current Rating: 2A AC,DC (AWG #24)

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C



Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A1501H-2P	1.50	4.50	3.30
A1501H-3P	3.00	6.00	4.80
A1501H-4P	4.50	7.50	6.30
A1501H-5P	6.00	9.00	7.80
A1501H-6P	7.50	10.50	9.30
A1501H-7P	9.00	12.00	10.80
A1501H-8P	10.50	13.50	12.30
A1501H-9P	12.00	15.00	13.80
A1501H-10P	13.50	16.50	15.30
A1501H-11P	15.00	18.00	16.80
A1501H-12P	16.50	19.50	18.30
A1501H-13P	18.00	21.00	19.80
A1501H-14P	19.50	22.50	21.30
A1501H-15P	21.00	24.00	22.80
A1501H-16P	22.50	25.50	24.30

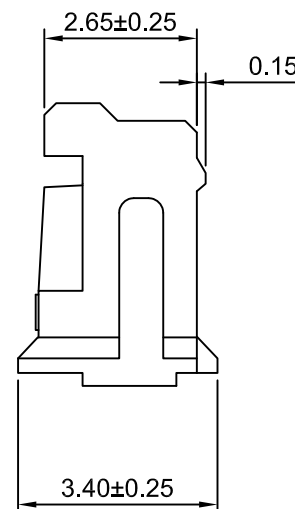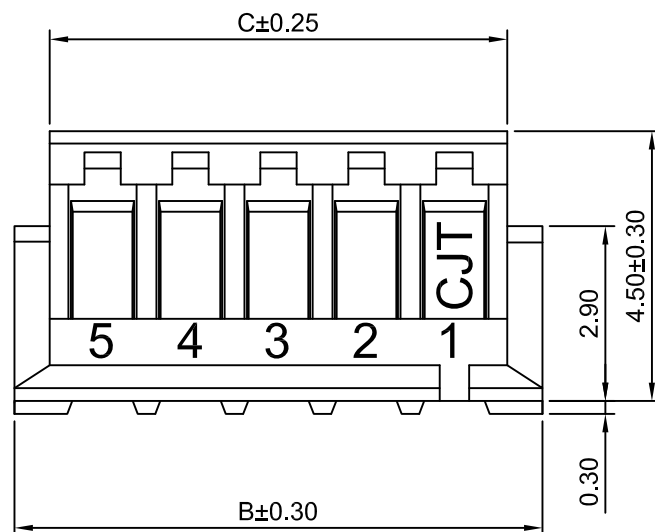

A4	CHANGE THE DRAWING	2023.01.11
A3	MODIFY DRAWING	2021.08.02
A2	CHANGE THE DRAWING	2021.03.17
A1	CHANGE CURRENT RATING	2019.02.18
A0	NEW RELEASE	2005.05.10
REV	DESCRIPTION	DATE

			CHANGJIANG CONNECTORS CO.,LTD	
Unit	Scale	Sheet	TITLE 1.50mm PITCH HOUSING	
mm	8:1	1 of 1		
DRWN	CHKD	APPR		
Chengbiao Ye	Diankui Wan	Jack Yin		
General Tolerances	THIRD ANGLE PROJECTION 		DRAWING NO.	REV A4
x.xx±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°				
			A1501H-XP	