

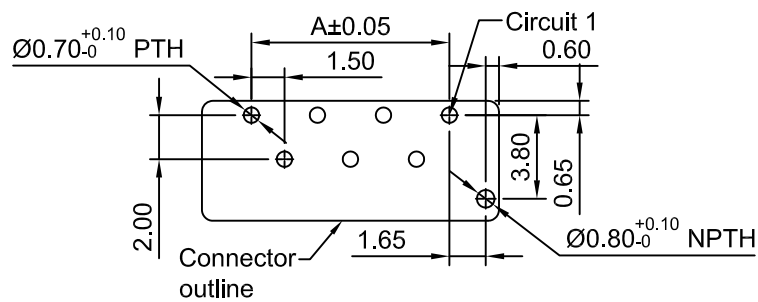
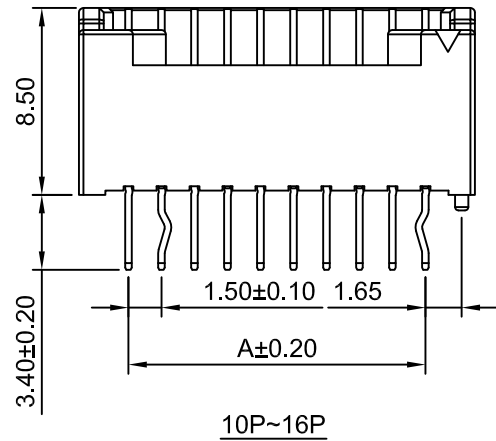
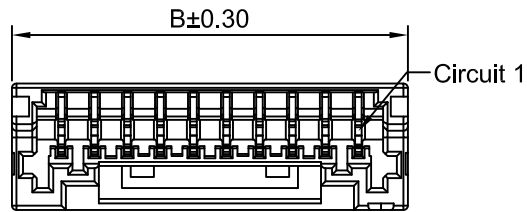




P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

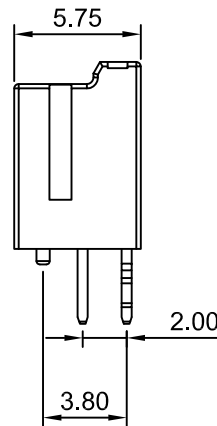

Ordering Information:

A1501WVD-F-XP - ***
1 2

1.Part NO.

2.Color:

(Blank): Natural

IV: Ivory

TR: Tomato

DH: Dark gray

LY: Lemon yellow

DO: Dark orange

BK: Black

GN: Green

BR: Brown

VYL: Vivid yellow

OR: Orange

BL: Blue

MG: Moss green

DPK: Dark pink

LE: Light blue



DP: Dark purple

RD: Red

YL: Yellow

VI: Purple

PK: Pink



SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 500MΩ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Phosphor Bronze/Tin over Nickel

Material:Nylon 66+Glass Fiber,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1501WVD-F-2P	1.50	6.00
A1501WVD-F-3P	3.00	7.50
A1501WVD-F-4P	4.50	9.00
A1501WVD-F-5P	6.00	10.50
A1501WVD-F-6P	7.50	12.00
A1501WVD-F-7P	9.00	13.50
A1501WVD-F-8P	10.50	15.00
A1501WVD-F-9P	12.00	16.50
A1501WVD-F-10P	13.50	18.00
A1501WVD-F-11P	15.00	19.50
A1501WVD-F-12P	16.50	21.00
A1501WVD-F-13P	18.00	22.50
A1501WVD-F-14P	19.50	24.00
A1501WVD-F-15P	21.00	25.50
A1501WVD-F-16P	22.50	27.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 1.50mm PITCH VERTICAL DIP HEADER	
mm	3:1	1 of 2		
DRAWN	CHK'D	APPR		
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION 	DRAWING NO. A1501WVD-F-XP	REV A0
x,xx±0.25 x,xxx±0.20 x,xxx±0.15 ANGLES ±1°				