
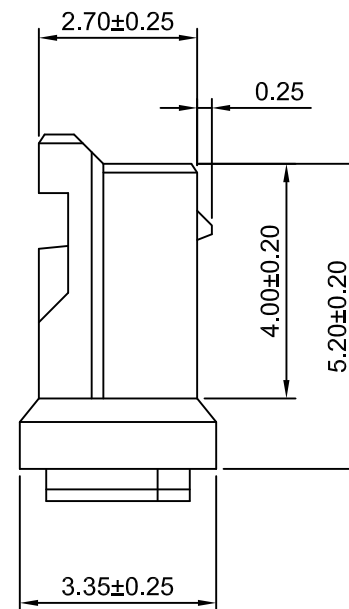
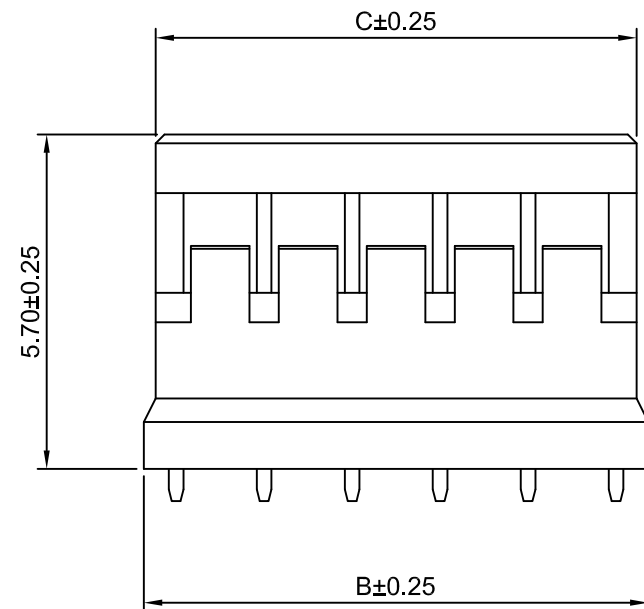


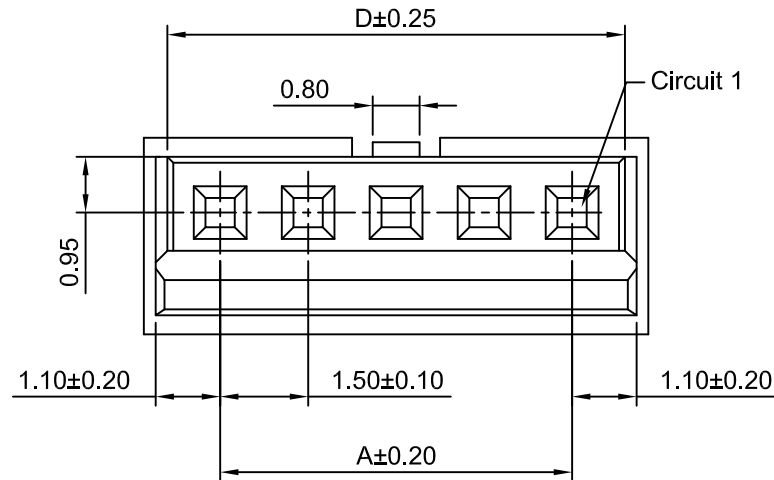

Ordering Information:

A1502H-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),

IEC 60335-1,5th Edition

Glow Wire Capable.

3.Color:

(Blank): White

BK: Black

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A1502H-2P	1.50	4.10	3.70	3.30
A1502H-3P	3.00	5.60	5.20	4.80
A1502H-4P	4.50	7.10	6.70	6.30
A1502H-5P	6.00	8.60	8.20	7.80
A1502H-6P	7.50	10.10	9.70	9.30
A1502H-7P	9.00	11.60	11.20	10.80
A1502H-8P	10.50	13.10	12.70	12.30
A1502H-9P	12.00	14.60	14.20	13.80
A1502H-10P	13.50	16.10	15.70	15.30
A1502H-11P	15.00	17.60	17.20	16.80
A1502H-12P	16.50	19.10	18.70	18.30
A1502H-13P	18.00	20.60	20.20	19.80
A1502H-14P	19.50	22.10	21.70	21.30
A1502H-15P	21.00	23.60	23.20	22.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		8:1		1 of 2			
DRWN		CHK'D		APPR		1.50mm PITCH	
Xu Lei		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		HOUSING	
x.xx±0.25							
x.xxx±0.20							
x.xxxx±0.15							
ANGLES ±1°						DRAWING NO.	
						REV	
						A2	
						A1502H-XP	

REV	DESCRIPTION	DATE
A2	CHANGE THE DRAWING	2022.01.13
A1	CHANGE THE DRAWING	2019.09.17
A0	NEW RELEASE	2005.05.10