

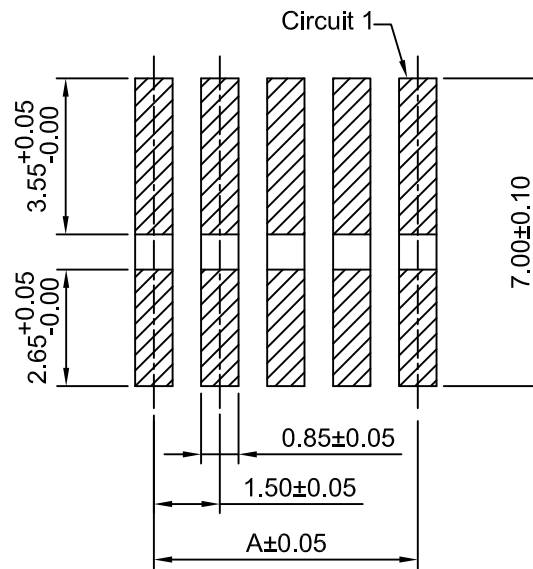
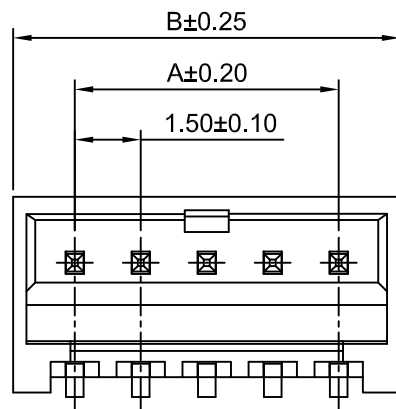



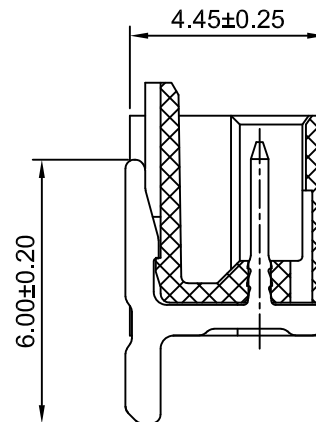

PCB LAYOUT

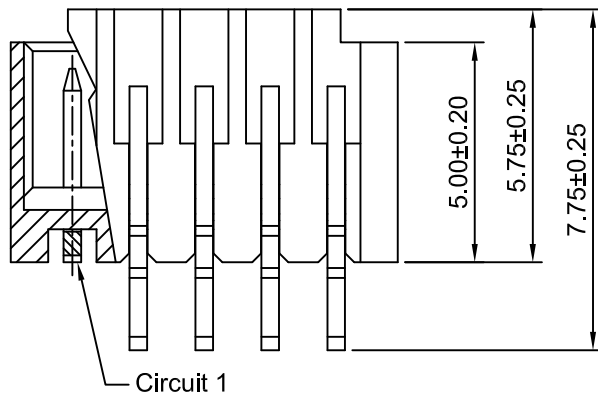

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP,UL94V-0(Ivory)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	4.30	9P	12.00	14.80
3P	3.00	5.80	10P	13.50	16.30
4P	4.50	7.30	11P	15.00	17.80
5P	6.00	8.80	12P	16.50	19.30
6P	7.50	10.30	13P	18.00	20.80
7P	9.00	11.80	14P	19.50	22.30
8P	10.50	13.30	15P	21.00	23.80

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 1.50mm PITCH RIGHT-ANGLE WAFER - SMT TYPE	
mm		6:1		1 of 1			
DRWN		CHK'D		APPR			
Xu Lei		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A1502WR-S-XP-LCP	
3		x,x±0,25					
0		x,x,x±0,20					
		x,x,x,x±0,15					
		ANGLES ±1°				REV A1	

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°



REV
A1