
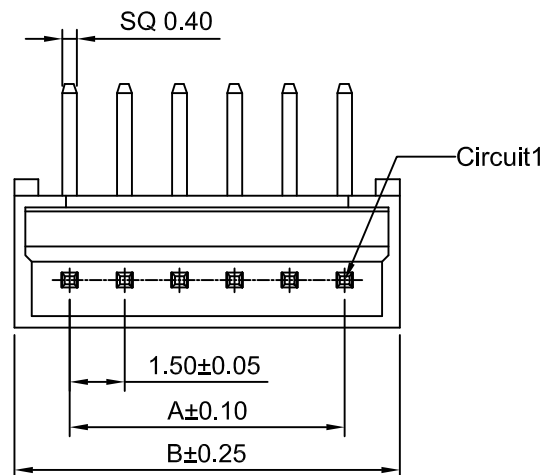
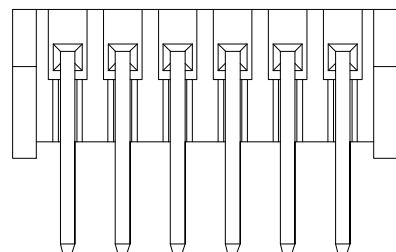
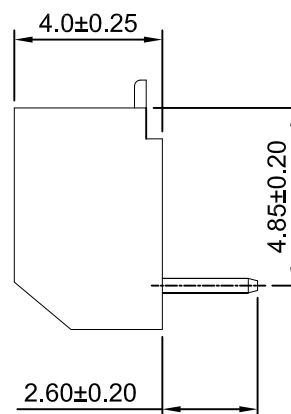


P.C.B LAYOUT
TOLERANCE:±0.05

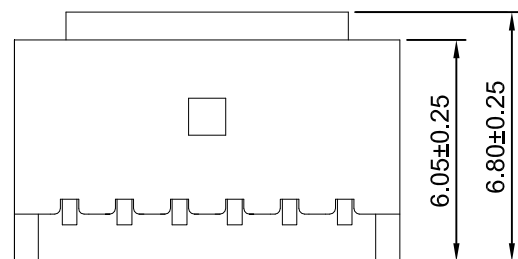

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)	
	A	B
A1502WR-2P	1.50	4.50
A1502WR-3P	3.00	6.00
A1502WR-4P	4.50	7.50
A1502WR-5P	6.00	9.00
A1502WR-6P	7.50	10.50
A1502WR-7P	9.00	12.00
A1502WR-8P	10.50	13.50
A1502WR-9P	12.00	15.00
A1502WR-10P	13.50	16.50
A1502WR-11P	15.00	18.00
A1502WR-12P	16.50	19.50
A1502WR-13P	18.00	21.00
A1502WR-14P	19.50	22.50
A1502WR-15P	21.00	24.00

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1	1.50mm PITCH RIGHT-ANGLE WAFER	
DRAWN	CHK'D	APPR		
Xiaoyan Luo	Dlankul Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	
A1	CHANGE THE DRAWING	2023.07.12	DRAWING NO. A1502WR-XP	
A0	NEW RELEASE	2022.01.13		
REV	DESCRIPTION	DATE		
			REV A1	