
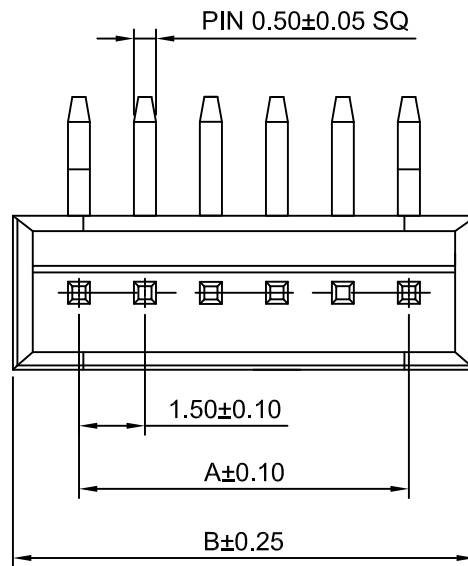
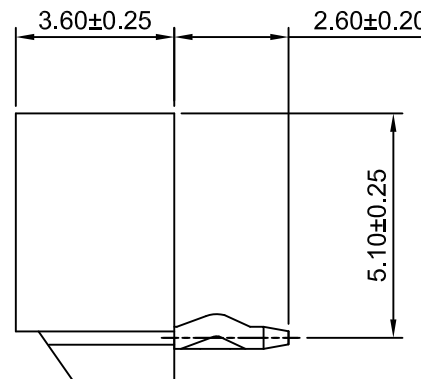


P.C.B LAYOUT

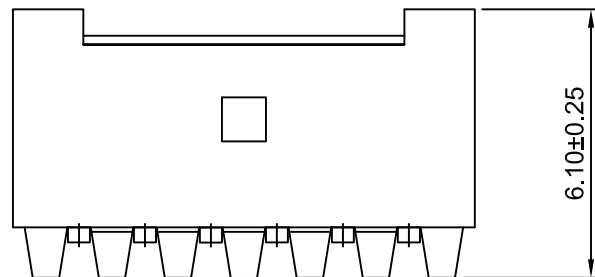

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 500MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	4.50	9P	12.00	15.00
3P	3.00	6.00	10P	13.50	16.50
4P	4.50	7.50	11P	15.00	18.00
5P	6.00	9.00	12P	16.50	19.50
6P	7.50	10.50	13P	18.00	21.00
7P	9.00	12.00	14P	19.50	22.50
8P	10.50	13.50	15P	21.00	24.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit			Scale			Sheet			TITLE		
mm			6:1			1 of 1					
DRWN			CHK'D			APPR			1.50mm PITCH		
Xu Lei			Diankui Wan			Jack Yin					
General Tolerances			THIRD ANGLE PROJECTION			RIGHT-ANGLE WAFER			DRAWING NO.		
3 x.x±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°											
A1502WRA-XP			REV A1								

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

