

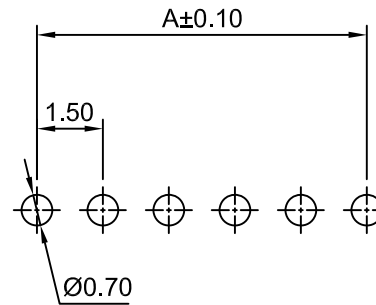
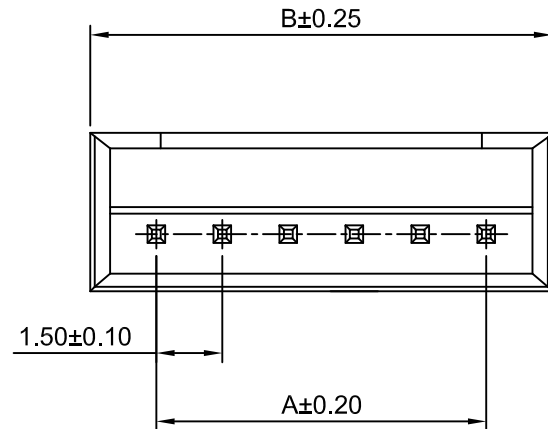


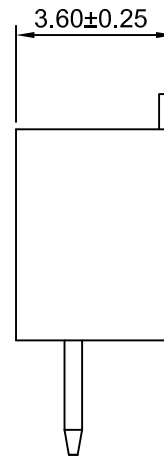

P.C.B LAYOUT
TOLERANCE: ± 0.05

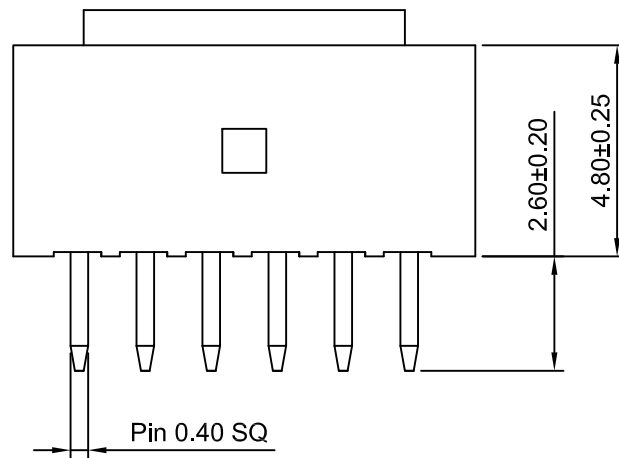

Ordering Information:

A1502WV-XP - ***
1 2

1.Part NO.

2.Finish:

(blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $20\text{m}\Omega$ Max.

Insulation Resistance: $1000\text{M}\Omega$ Min.

Withstanding Voltage: 500V AC/minute

Pin Material: Brass/Tin over Nickel

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A1502WV-2P	1.50	4.50
A1502WV-3P	3.00	6.00
A1502WV-4P	4.50	7.50
A1502WV-5P	6.00	9.00
A1502WV-6P	7.50	10.50
A1502WV-7P	9.00	12.00
A1502WV-8P	10.50	13.50
A1502WV-9P	12.00	15.00
A1502WV-10P	13.50	16.50
A1502WV-11P	15.00	18.00
A1502WV-12P	16.50	19.50
A1502WV-13P	18.00	21.00
A1502WV-14P	19.50	22.50
A1502WV-15P	21.00	24.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1		
DRWN	CHK'D	APPR	1.50mm PITCH VERTICAL WAFER	
Xu Lei	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A1502WV-XP	REV A1
x.xx $\pm$ 0.25 x.xxx $\pm$ 0.20 x.xxxx $\pm$ 0.15 ANGLES $\pm 1^{\circ}$				

A1	CHANGE THE DRAWING	2022.01.13
A0	NEW RELEASE	2013.05.16
REV	DESCRIPTION	DATE