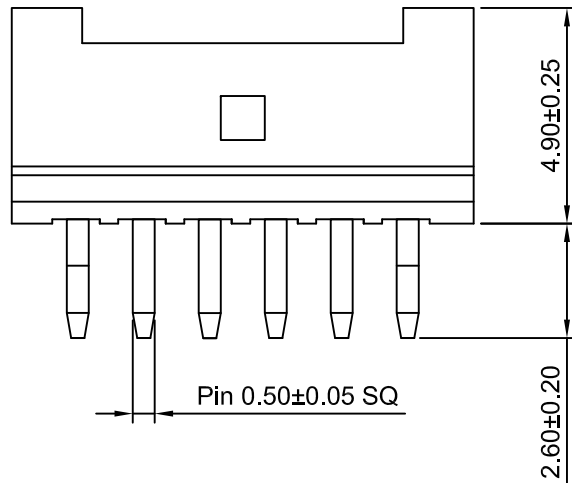
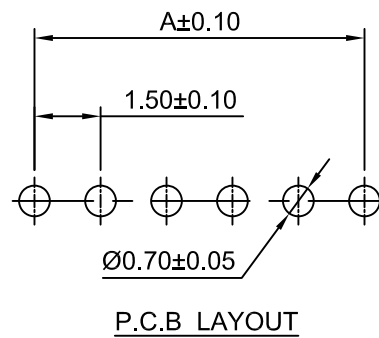
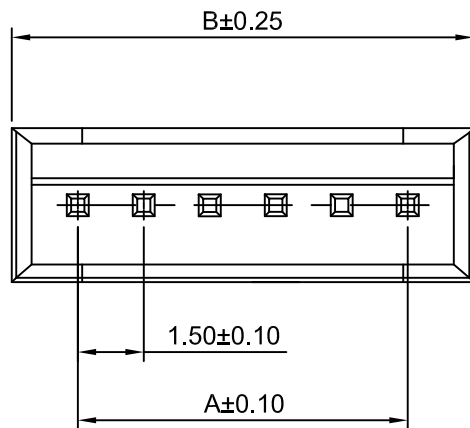


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact Resistance: $20\text{m}\Omega$ Max.
Insulation Resistance: $500\text{M}\Omega$ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0(Gray)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.50	4.50	9P	12.00	15.00
3P	3.00	6.00	10P	13.50	16.50
4P	4.50	7.50	11P	15.00	18.00
5P	6.00	9.00	12P	16.50	19.50
6P	7.50	10.50	13P	18.00	21.00
7P	9.00	12.00	14P	19.50	22.50
8P	10.50	13.50	15P	21.00	24.00

CJTconn				CHANGJIANG CONNECTORS CO.,LTD.	
Unit	Scale	Sheet	TITLE		
mm	6:1	1 of 1	1.50mm PITCH		
DRWN	CHK'D	APPR	VERTICAL WAFER		
Xu Lei	Diankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°			A1502WVA-XP		A1