

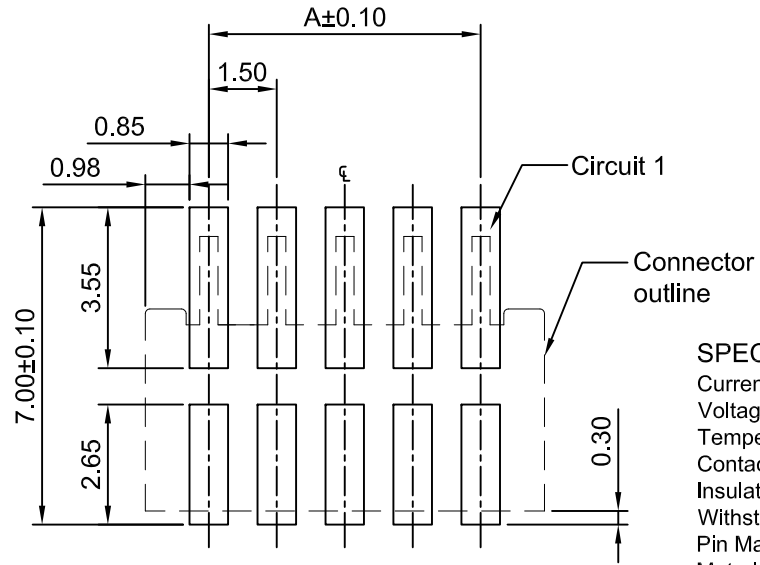
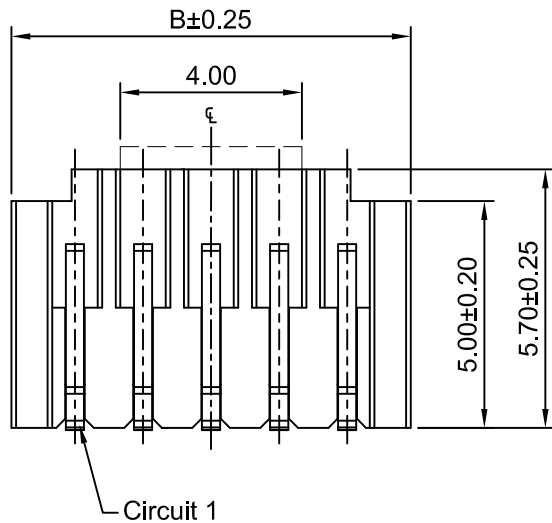
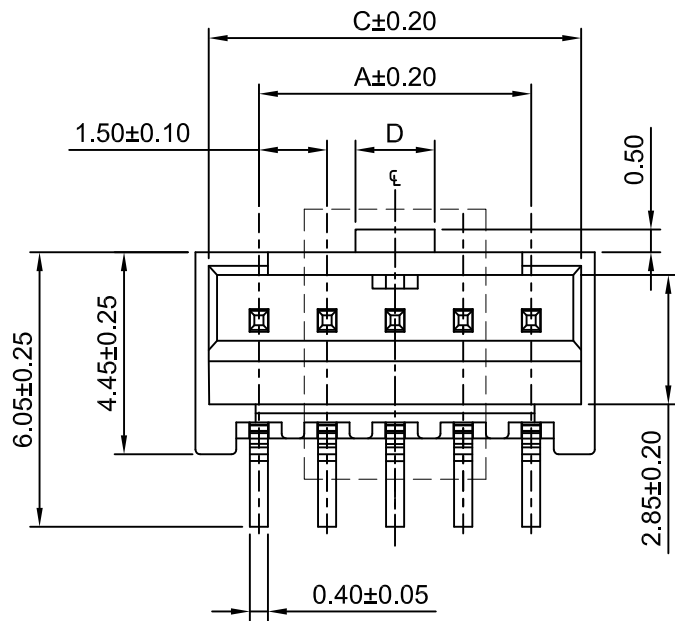




P.C.B LAYOUT (TOP VIEW)
TOLERANCE: ±0.05

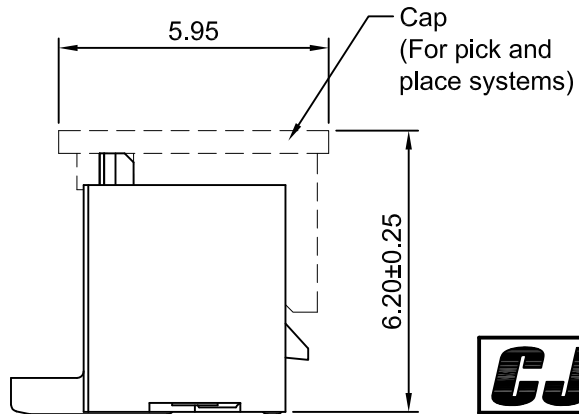

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Tin over Nickel
Material: LCP, UL94V-0 (Ivory)

Ordering Information & Dimensions

Part NO.	Dimensions (mm)			
	A	B	C	D
A1502WVB-S-2P	1.50	4.30	3.70	0.90
A1502WVB-S-3P	3.00	5.80	5.20	0.90
A1502WVB-S-4P	4.50	7.30	6.70	1.80
A1502WVB-S-5P	6.00	8.80	8.20	1.80
A1502WVB-S-6P	7.50	10.30	9.70	1.80
A1502WVB-S-7P	9.00	11.80	11.20	1.80
A1502WVB-S-8P	10.50	13.30	12.70	3.60
A1502WVB-S-9P	12.00	14.80	14.20	3.60
A1502WVB-S-10P	13.50	16.30	15.70	3.60
A1502WVB-S-11P	15.00	17.80	17.20	3.60
A1502WVB-S-12P	16.50	19.30	18.70	3.60
A1502WVB-S-13P	18.00	20.80	20.20	3.60
A1502WVB-S-14P	19.50	22.30	21.70	3.60
A1502WVB-S-15P	21.00	23.80	23.20	3.60

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet	TITLE	
mm	6:1	1 of 1	1.50mm PITCH VERTICAL WAFER - SMD TYPE	
DRAWN	CHK'D	APPR		
Haisen Li	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			A1502WVB-S-XP	
x, x±0.25 x, xx±0.20 x, xxx±0.15 ANGLES ±1°			REV A3	

A3	CHANGE THE DRAWING	2022.09.23
A2	CHANGE THE DRAWING	2022.01.13
A1	MODIFY DRAWING	2021.07.01
A0	NEW RELEASE	2018.06.28
REV	DESCRIPTION	DATE