


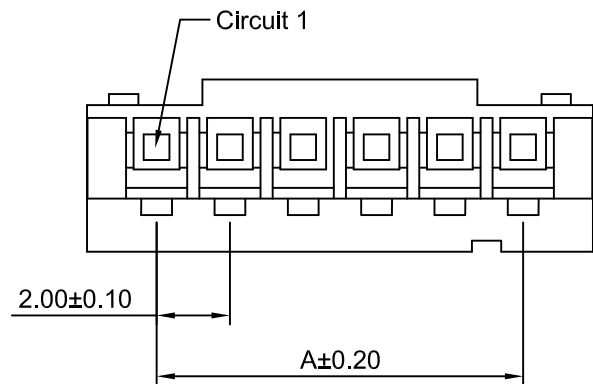


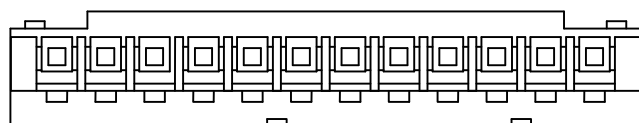


6P~11P

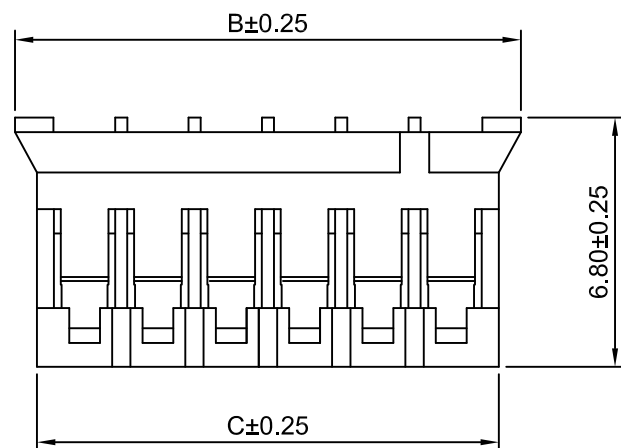



12P~16P




3P



2P

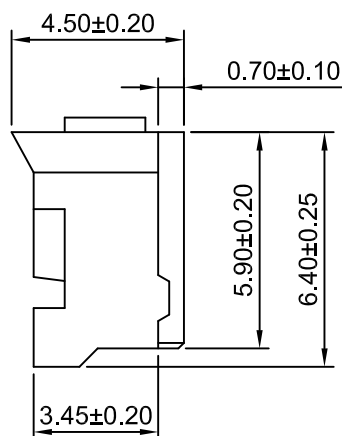

4P~5P



Ordering Information:

A2001H-XP - *** - ***
1 2 3

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

BK: Black RD: Red
BL:Blue YL: Yellow

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating:100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2001H-2P	2.00	5.80	4.60
A2001H-3P	4.00	7.80	6.60
A2001H-4P	6.00	9.80	8.60
A2001H-5P	8.00	11.80	10.60
A2001H-6P	10.00	13.80	12.60
A2001H-7P	12.00	15.80	14.60
A2001H-8P	14.00	17.80	16.60
A2001H-9P	16.00	19.80	18.60
A2001H-10P	18.00	21.80	20.60
A2001H-11P	20.00	23.80	22.60
A2001H-12P	22.00	25.80	24.60
A2001H-13P	24.00	27.80	26.60
A2001H-14P	26.00	29.80	28.60
A2001H-15P	28.00	31.80	30.60
A2001H-16P	30.00	33.80	32.60

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

A5	CHANGE THE DRAWING	2021.10.25
A4	CHANGE THE DRAWING	2021.10.09
A3	CHANGE THE DRAWING	2020.07.07
A2	STRUCTURAL CHANGE	2015.06.15
A1	MODIFYING DIMENSIONS	2015.01.14
A0	NEW RELEASE	2011.11.12
REV	DESCRIPTION	DATE

Unit	Scale	Sheet
mm	1:1	1 of 1
DRWN	CHK'D	APPR
Haisen Li	Diankui Wan	Jack Yin
General Tolerances		THIRD ANGLE PROJECTION
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°		

TITLE		
2.00mm PITCH HOUSING		
DRAWING NO.		REV
A2001H-XP		A5