


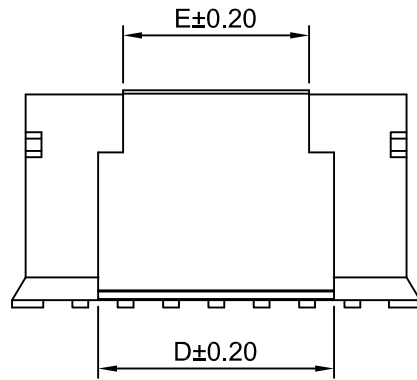
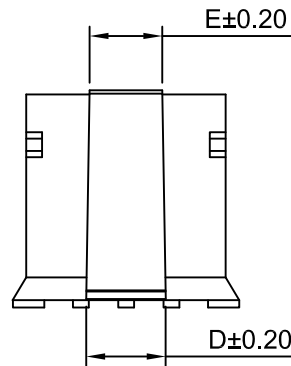


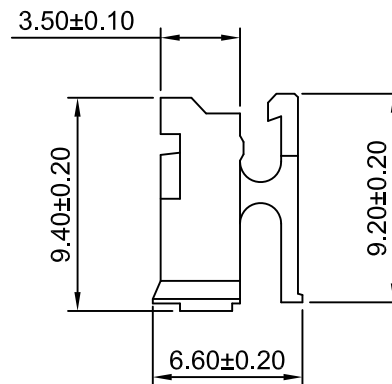

5P~16P

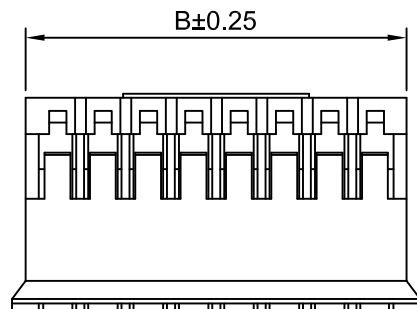

3P~4P

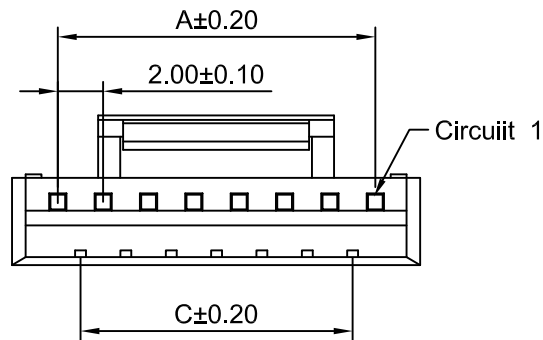

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating:100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Material: Nylon 66,UL94V-0 (White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)				
	A	B	C	D	E
A2001HA-3P	4.00	6.80	2.00	1.85	1.70
A2001HA-4P	6.00	8.80	4.00	3.50	3.20
A2001HA-5P	8.00	10.80	6.00	5.50	3.30
A2001HA-6P	10.00	12.80	8.00	7.50	5.30
A2001HA-7P	12.00	14.80	10.00	9.50	7.30
A2001HA-8P	14.00	16.80	12.00	10.40	8.20
A2001HA-9P	16.00	18.80	14.00	10.40	8.20
A2001HA-10P	18.00	20.80	16.00	10.40	8.20
A2001HA-11P	20.00	22.80	18.00	10.40	8.20
A2001HA-12P	22.00	24.80	20.00	10.40	8.20
A2001HA-13P	24.00	26.80	22.00	10.40	8.20
A2001HA-14P	26.00	28.80	24.00	10.40	8.20
A2001HA-15P	28.00	30.80	26.00	10.40	8.20
A2001HA-16P	30.00	32.80	28.00	10.40	8.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A1
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°				