


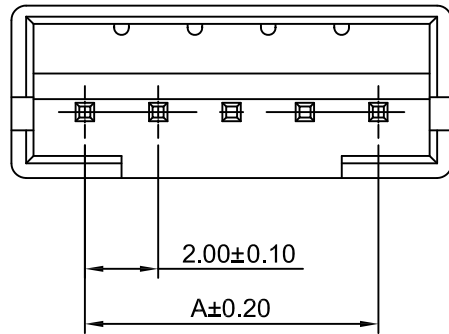




3P~20P

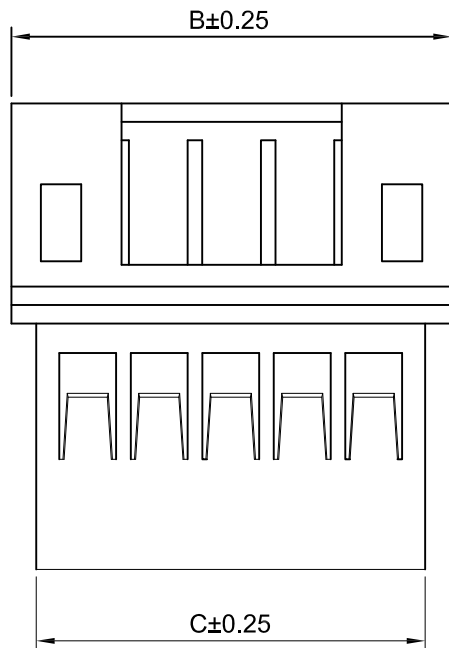

2P

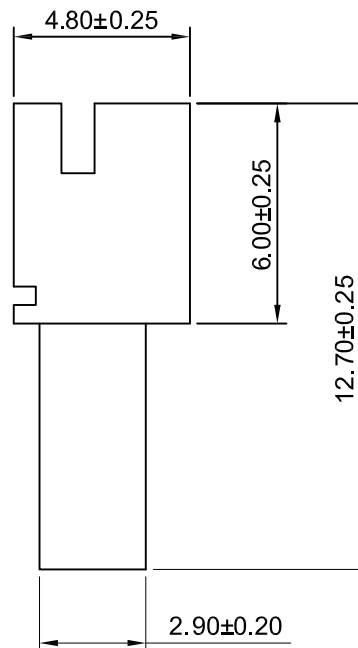

Ordering Information:

A2001HM-XP - ***
1 2

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

3.Color:

(Blank): White BL: Blue
RD: Red BK:Black
YL: Yellow GN: Green

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 800V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	6.00	4.60	12P	22.00	26.00	24.60
3P	4.00	8.00	6.60	13P	24.00	28.00	26.60
4P	6.00	10.00	8.60	14P	26.00	30.00	28.60
5P	8.00	12.00	10.60	15P	28.00	32.00	30.60
6P	10.00	14.00	12.60	16P	30.00	34.00	32.60
7P	12.00	16.00	14.60	17P	32.00	36.00	34.60
8P	14.00	18.00	16.60	18P	34.00	38.00	36.60
9P	16.00	20.00	18.60	19P	36.00	40.00	38.60
10P	18.00	22.00	20.60	20P	38.00	42.00	40.60
11P	20.00	24.00	22.60				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	5:1	1 of 1			
DRAWN	CHKD	APPR	2.00mm PITCH HOUSING		
Haisen Li	Djankui Wan	Jack Yin			
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.		REV
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°					
A0	NEW RELEASE	2016,10,20	A2001HM-XP		A0
REV	DESCRIPTION	DATE			