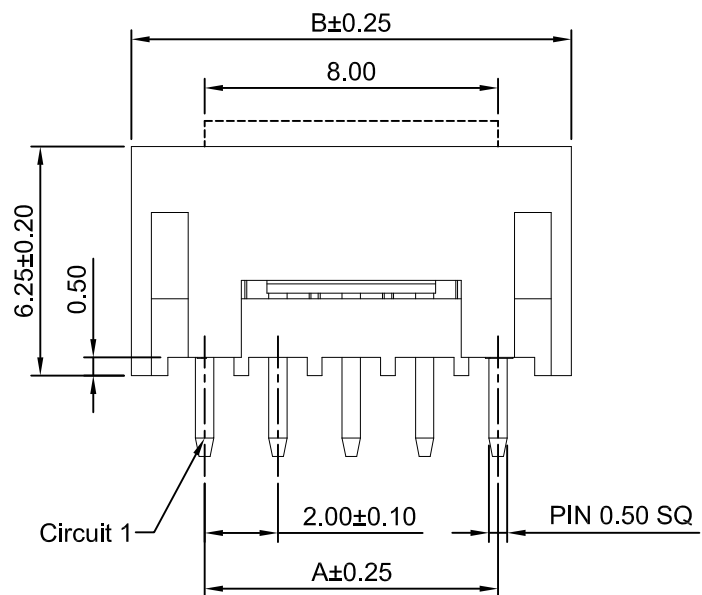
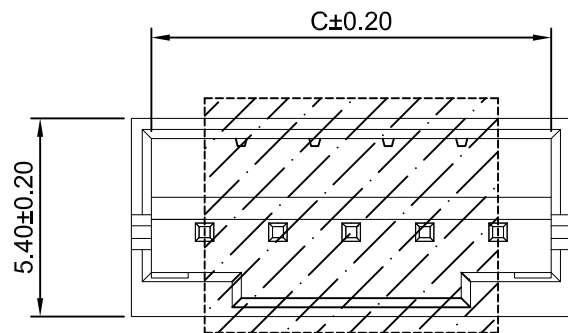


P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:
A2001WVA-XP-P-LCP - ^{**}/₂ - ^{***}/₃

1.Part No.

2.Finish:

(Blank): Tin over Nickel

G:Gold over Nickel (Au:1u")

G3: Gold over Nickel(Au:3u")


G15: Gold over Nickel(Au:15u",Mating Area)

G30: Gold over Nickel(Au:30u",Mating Area)

3.Packing:

(Blank): Bag

CRE: Tape & Reel with cap

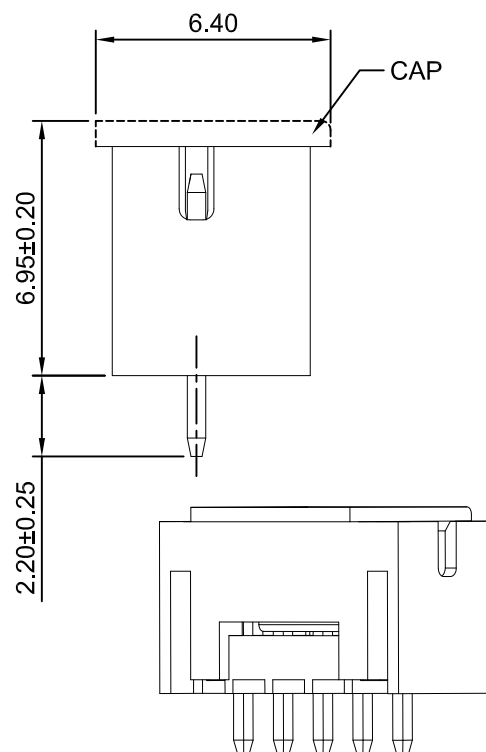

SPECIFICATIONS:

Current Rating: 2A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Pin Material: Brass

Material: LCP,UL94V-0(Beige)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
A2001WVA-2P-P-LCP	2.00	6.00	4.90
A2001WVA-3P-P-LCP	4.00	8.00	6.90
A2001WVA-4P-P-LCP	6.00	10.00	8.90
A2001WVA-5P-P-LCP	8.00	12.00	10.90
A2001WVA-6P-P-LCP	10.00	14.00	12.90
A2001WVA-7P-P-LCP	12.00	16.00	14.90
A2001WVA-8P-P-LCP	14.00	18.00	16.90
A2001WVA-9P-P-LCP	16.00	20.00	18.90
A2001WVA-10P-P-LCP	18.00	22.00	20.90
A2001WVA-11P-P-LCP	20.00	24.00	22.90
A2001WVA-12P-P-LCP	22.00	26.00	24.90
A2001WVA-13P-P-LCP	24.00	28.00	26.90
A2001WVA-14P-P-LCP	26.00	30.00	28.90
A2001WVA-15P-P-LCP	28.00	32.00	30.90
A2001WVA-16P-P-LCP	30.00	34.00	32.90

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	5:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH VERTICAL WAFER	
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2001WVA-XP-P-LCP	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2020.10.12
REV	DESCRIPTION	DATE