
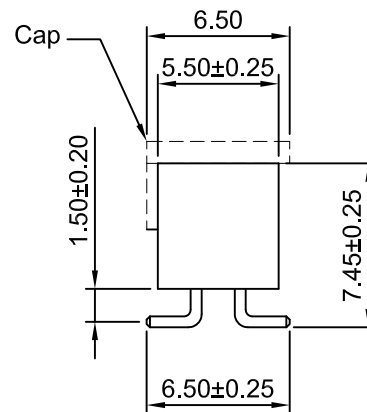
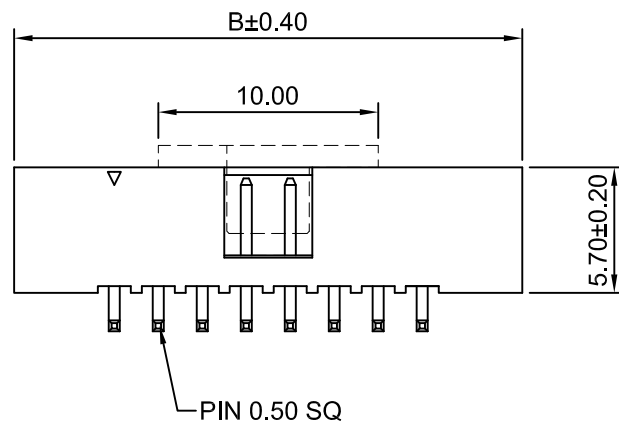
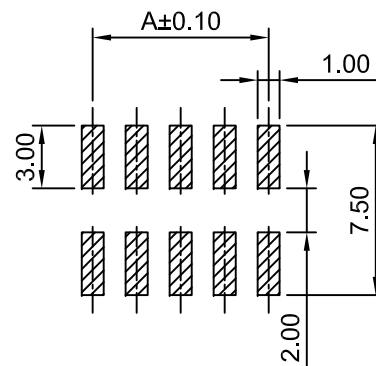


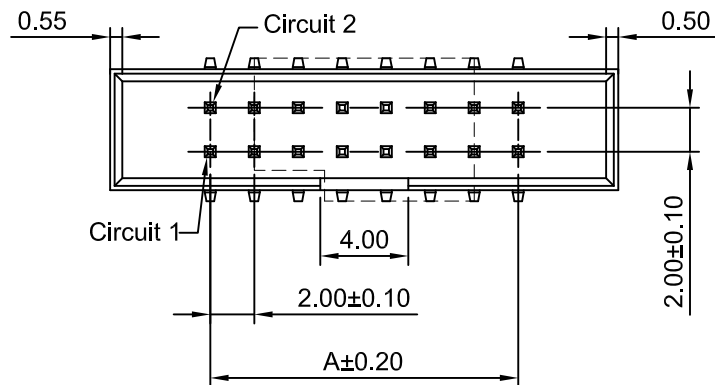

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Material: Nylon 6T,UL94V-0(Black)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x3P	4.00	13.20	2x13P	24.00	33.20
2x4P	6.00	15.20	2x14P	26.00	35.20
2x5P	8.00	17.20	2x15P	28.00	37.20
2x6P	10.00	19.20	2x16P	30.00	39.20
2x7P	12.00	21.20	2x17P	32.00	41.20
2x8P	14.00	23.20	2x18P	34.00	43.20
2x9P	16.00	25.20	2x20P	38.00	47.20
2x10P	18.00	27.20	2x22P	44.00	51.20
2x11P	20.00	29.20	2x25P	48.00	57.20
2x12P	22.00	31.20	2x34P	66.00	75.20

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 2.00mm PITCH 180° DUAL ROW BOX HEADER - SMT TYPE	
mm		3:1		1 of 1			
DRAWN		CHK'D		APPR			
ZhenNing Luo		Djankui Wan		Jack Yin		DRAWING NO. A2005WV-N-S-2xXP	
General Tolerances		THIRD ANGLE PROJECTION					
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°							
2		x,xx±0.25		REV		A1	
5		x,xxx±0.20					
		x,xxxx±0.15					
		ANGLES ±1°					