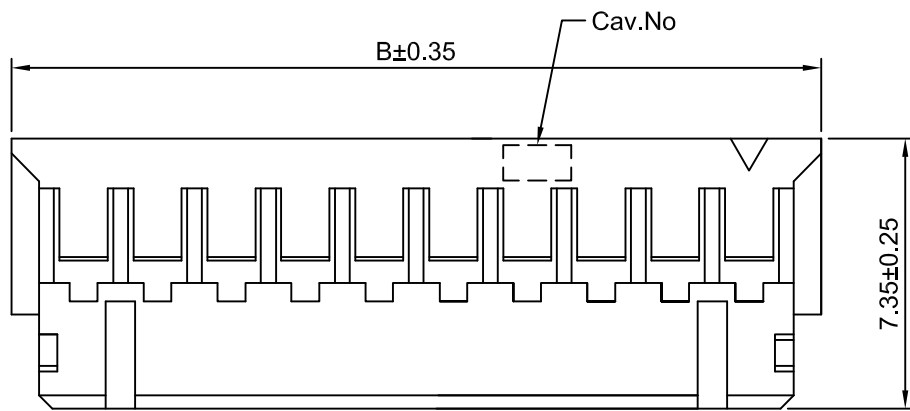
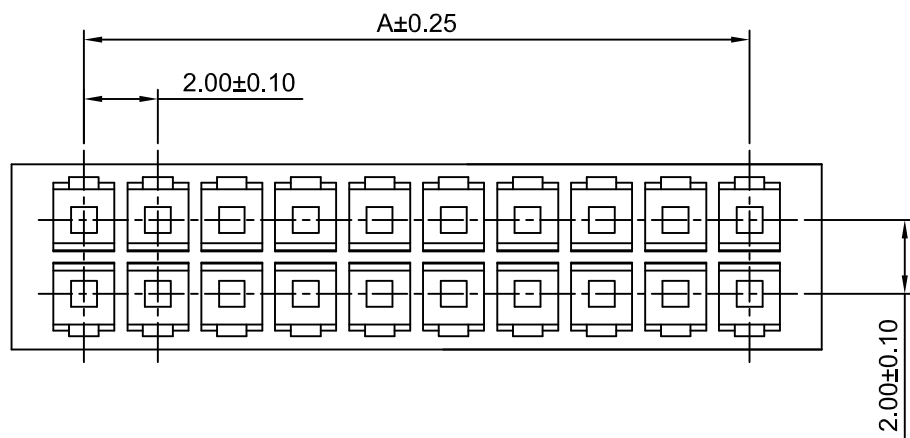


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2006H-2x3P	4.00	7.90
A2006H-2x4P	6.00	9.90
A2006H-2x5P	8.00	11.90
A2006H-2x6P	10.00	13.90
A2006H-2x7P	12.00	15.90
A2006H-2x8P	14.00	17.90
A2006H-2x9P	16.00	19.90
A2006H-2x10P	18.00	21.90
A2006H-2x11P	20.00	23.90
A2006H-2x12P	22.00	25.90
A2006H-2x13P	24.00	27.90
A2006H-2x14P	26.00	29.90
A2006H-2x15P	28.00	31.90
A2006H-2x16P	30.00	33.90
A2006H-2x17P	32.00	35.90
A2006H-2x18P	34.00	37.90
A2006H-2x19P	36.00	39.90
A2006H-2x20P	38.00	41.90

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE 2.00mm PITCH DUAL ROW HOUSING	
mm	5:1	1 of 1		
DRAWN	CHK'D	APPR		
Chengbiao Ye	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				
			A2006H-2xXP	