


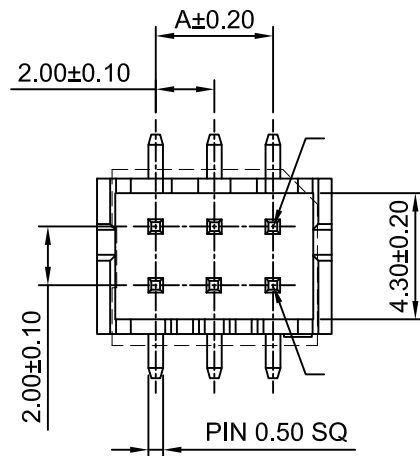





2x3P~2x25P

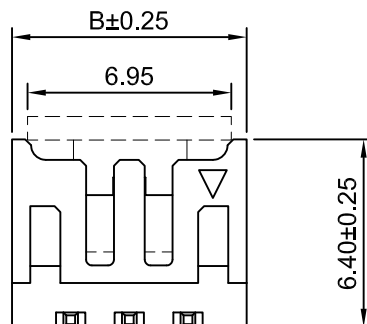

2x2P

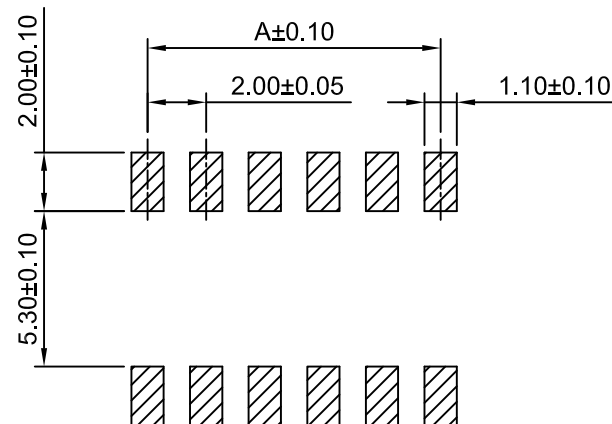

P.C.B LAYOUT

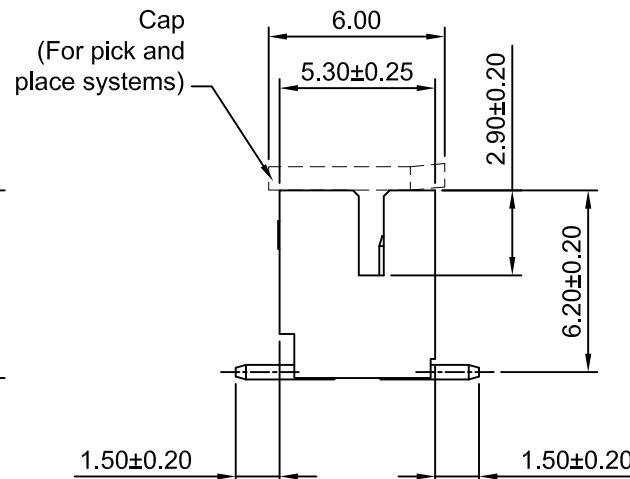

Ordering Information:


A2006WV-S-2xXP - ***

1. Part NO.

2. Material:

(Blank): Nylon 6T, UL94V-0 (Beige)

9T: Nylon 9T, UL94V-0 (Beige)



SPECIFICATIONS:

Current Rating: 3A AC, DC

Voltage Rating: 250V AC, DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin over Nickel

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2x2P	2.00	6.00	2x12P	22.00	26.00
2x3P	4.00	8.00	2x13P	24.00	28.00
2x4P	6.00	10.00	2x14P	26.00	30.00
2x5P	8.00	12.00	2x15P	28.00	32.00
2x6P	10.00	14.00	2x16P	30.00	34.00
2x7P	12.00	16.00	2x17P	32.00	36.00
2x8P	14.00	18.00	2x18P	34.00	38.00
2x9P	16.00	20.00	2x19P	36.00	40.00
2x10P	18.00	22.00	2x20P	38.00	42.00
2x11P	20.00	24.00			

CJTconn

CHANGJIANG CONNECTORS CO., LTD.

Unit		Scale		Sheet		TITLE 2.00mm PITCH 180° DUAL ROW WAFER - SMT TYPE	
mm		4:1		1 of 1			
DRAWN		CHK'D		APPR			
Chengbiao Ye		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		DRAWING NO. A2006WV-S-2xXP	
x.xx±0.25							
x.xxx±0.20							
x.xxx±0.15							
ANGLES ±1°						REV A1	

A1	CHANGE THE DRAWING	2019.12.31
A0	NEW RELEASE	2005.06.15
REV	DESCRIPTION	DATE