

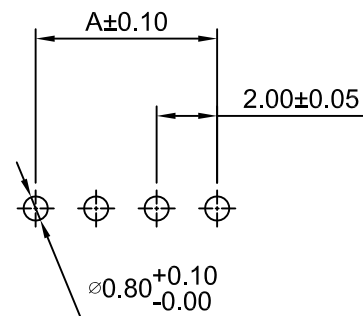
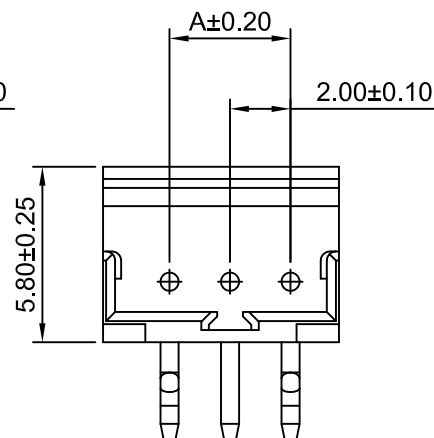


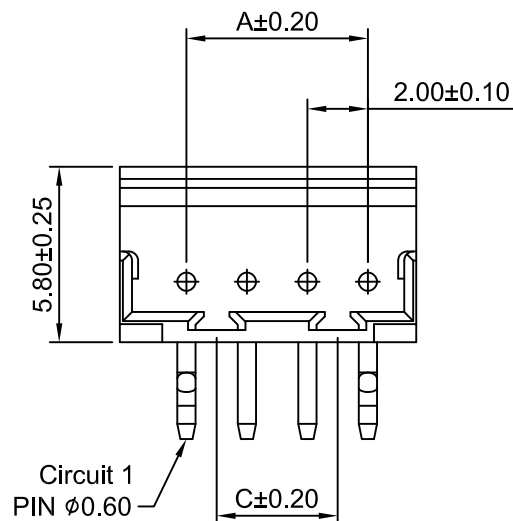

P.C.B LAYOUT




SPECIFICATIONS:


Current Rating: 4A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions


Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	B
2P	2.00	5.80	---	9P	16.00	19.80	14.00
3P	4.00	7.80	---	10P	18.00	21.80	16.00
4P	6.00	9.80	4.00	11P	20.00	23.80	18.00
5P	8.00	11.80	6.00	12P	22.00	25.80	20.00
6P	10.00	13.80	8.00	13P	24.00	27.80	22.00
7P	12.00	15.80	10.00	14P	26.00	29.80	24.00
8P	14.00	17.80	12.00	15P	28.00	31.80	26.00

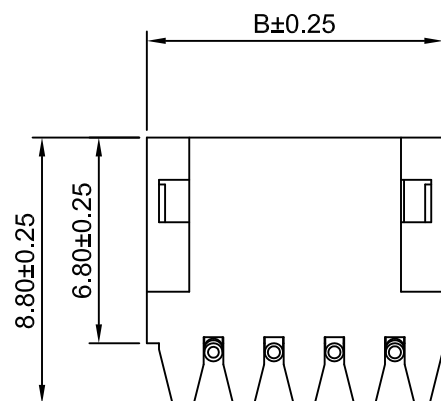

4P~15P

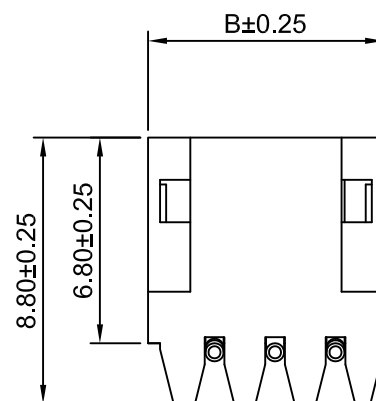

2P~3P

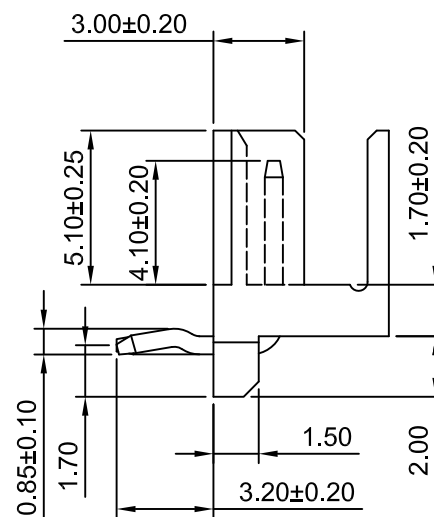

CJTconn			CHANGJIANG CONNECTORS CO.,LTD.	
Unit mm	Scale 4:1	Sheet 1 of 1	Title : 2.00mm Pitch 90° Wafer	
Draw BY: Diankui Wan		Approved : Jack Yin		
General Tolerance			DRAW NO : A2007WRD-XP	REV A1
A1	CHANGE THE DRAWING	2019.07.16		
A0	NEW RELEASE	2013.05.24		
REV	DESCRIPTION	DATE		

			x.x±0.25	PROJECT
			x.xx±0.20	
			x.xxx±0.15	