






5P~16P



4P



2P~3P

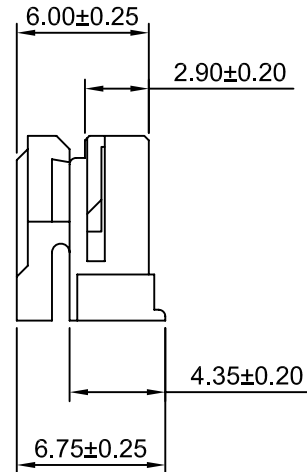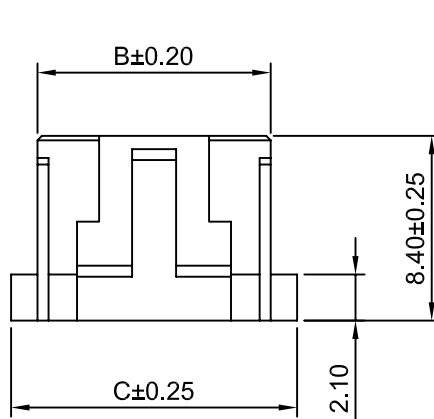

Ordering Information:

A2008HB-XP - **
1 2

1.Part No.

2.Color:


(blank) : White

BK : Black

RD : Red

BL : Blue

GY : Gray



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	4.60	7.00	10P	18.00	20.60	23.00
3P	4.00	6.60	9.00	11P	20.00	22.60	25.00
4P	6.00	8.60	11.00	12P	22.00	24.60	27.00
5P	8.00	10.60	13.00	13P	24.00	26.60	29.00
6P	10.00	12.60	15.00	14P	26.00	28.60	31.00
7P	12.00	14.60	17.00	15P	28.00	30.60	33.00
8P	14.00	16.60	19.00	16P	30.00	32.60	35.00
9P	16.00	18.60	21.00				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	3:1	1 of 1
Draw BY:		Approved :
Tony Su		Jack Yin

Title :

2.00mm PITCH

HOUSING

DRAW NO : A2008HB-XP

REV
A2

A2	CHANGE THE DRAWING	2018.05.10	General Tolerance	
A1	Version update	2017.12.13	x.xx±0.25	ANGLE±
A0	NEW RELEASE	2013.06.25	x.xx±0.20	⌀
REV	DESCRIPTION	DATE	x.xxx±0.15	