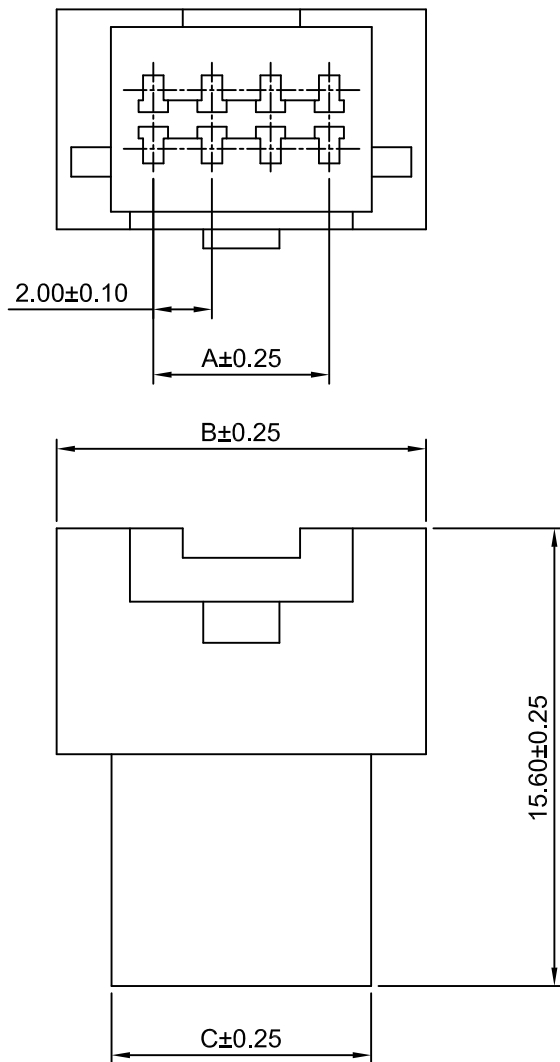


SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact Resistance: $30\text{m}\Omega$ Max

Insulation Resistance: $1000\text{M}\Omega$ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2008HM-2x2P	2.00	8.60	4.85
A2008HM-2x3P	4.00	10.60	6.85
A2008HM-2x4P	6.00	12.60	8.85
A2008HM-2x5P	8.00	14.60	10.85
A2008HM-2x6P	10.00	16.60	12.85
A2008HM-2x7P	12.00	18.60	14.85
A2008HM-2x8P	14.00	20.60	16.85
A2008HM-2x9P	16.00	22.60	18.85
A2008HM-2x10P	18.00	24.60	20.85
A2008HM-2x11P	20.00	26.60	22.85
A2008HM-2x12P	22.00	28.60	24.85
A2008HM-2x13P	24.00	30.60	26.85
A2008HM-2x14P	26.00	32.60	28.85
A2008HM-2x15P	28.00	34.60	30.85

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE 2.00mm PITCH DUAL ROW HOUSING
mm	4:1	1 of 1	
DRWN	CHK'D	APPR	
Chengbiao Ye	Diankui Wan	Jack Yin	DRAWING NO. A2008HM-2xXP
General Tolerances			
THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A2
			
A1			
NEW RELEASE			REV A2
2019.11.22			
REV			
DESCRIPTION			REV A2
DATE			