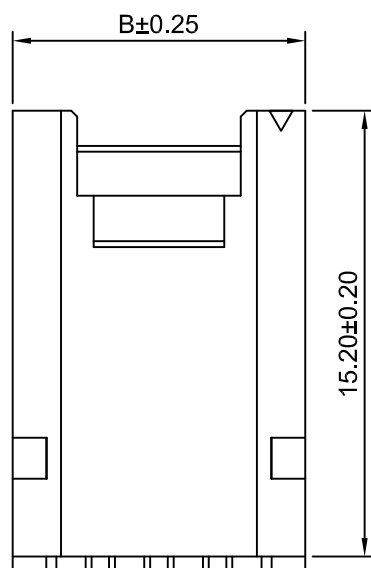
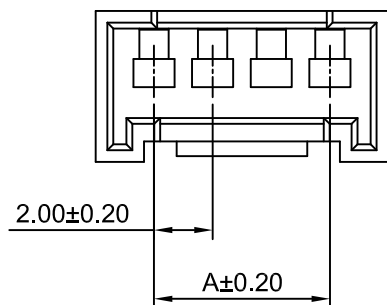


SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 1000V AC/minute
Material: Nylon66 UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	5.98	9P	16.00	19.98
3P	4.00	7.98	10P	18.00	21.98
4P	6.00	9.98	11P	20.00	23.98
5P	8.00	11.98	12P	22.00	25.98
6P	10.00	13.98	13P	24.00	27.98
7P	12.00	15.98	14P	26.00	29.98
8P	14.00	17.98	15P	28.00	31.98

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:		Approved :
Jack Yin		GONGYB

Title :		2.00mm PITCH	
		HOUSING	
DRAW NO :		A2008HMB-XP	REV A1

General Tolerance			ANGLE±
AO	NEW RELEEASE	2013.12.26	
REV	DESCRIPTION	DATE	