

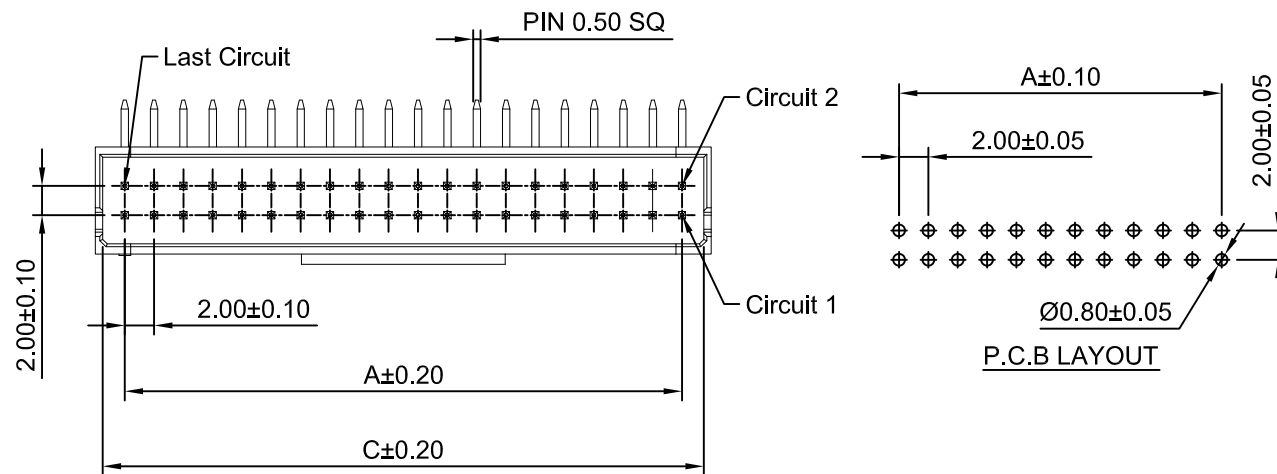


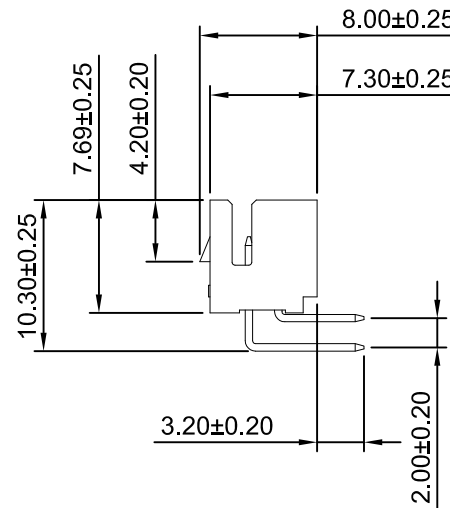

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 46, UL94V-0 (Ivory)
Soldering Temperature: 260°C±5°C
Immersion Period: 3-5 seconds
Ordering Information & Dimensions

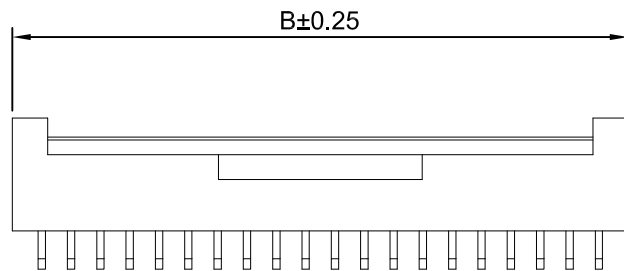

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2x2P	2.00	6.00	5.00	2x12P	22.00	26.00	25.00
2x3P	4.00	8.00	7.00	2x13P	24.00	28.00	27.00
2x4P	6.00	10.00	9.00	2x14P	26.00	30.00	29.00
2x5P	8.00	12.00	11.00	2x15P	28.00	32.00	31.00
2x6P	10.00	14.00	13.00	2x16P	30.00	34.00	33.00
2x7P	12.00	16.00	15.00	2x17P	32.00	36.00	35.00
2x8P	14.00	18.00	17.00	2x18P	34.00	38.00	37.00
2x9P	16.00	20.00	19.00	2x19P	36.00	40.00	39.00
2x10P	18.00	22.00	21.00	2x20P	38.00	42.00	41.00
2x11P	20.00	24.00	23.00				

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		2:1		1 of 1			
DRAWN		CHK'D		APPR		2.00mm Pitch	
Haisen Li		Diankui Wan		Jack Yin			
General Tolerances				THIRD ANGLE PROJECTION		90° Wafer	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°							
DRAWING NO.						REV	
A2008WR-2xXP-46						A3	

REV	DESCRIPTION	DATE
A3	CHANGE THE DRAWING	2022.01.10
A2	CHANGE THE FIRST CIRCUIT	2019.10.10
A1	ADD THE SIZE OF 2x2P~2x4P	2019.09.30
A0	NEW RELEASE	2019.09.27