

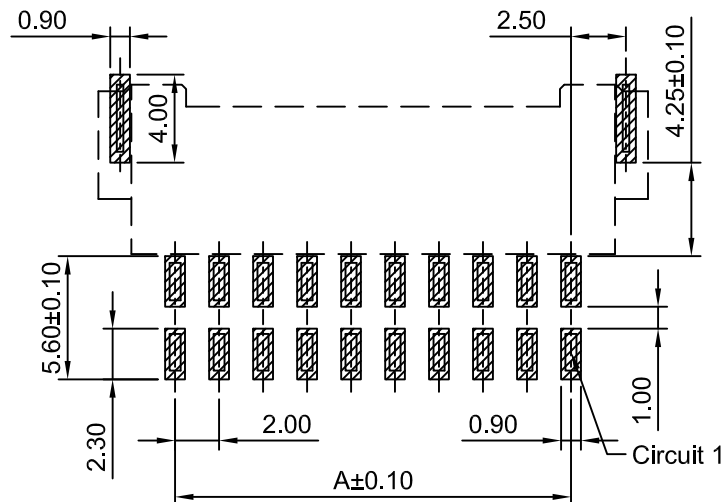

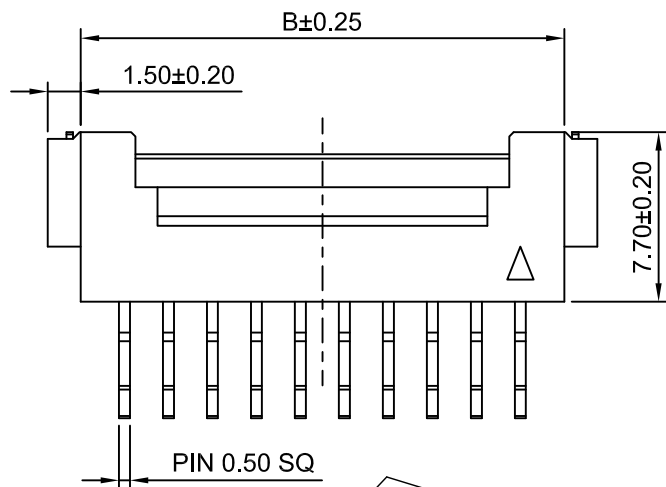


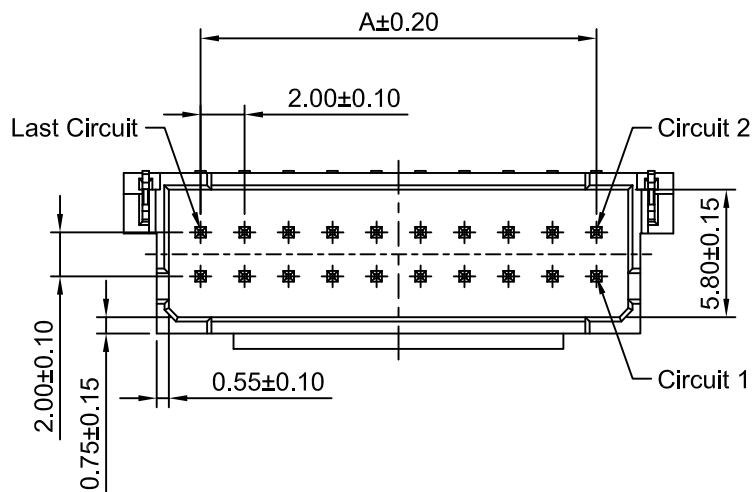

P.C.B LAYOUT
TOLERANCE:±0.05

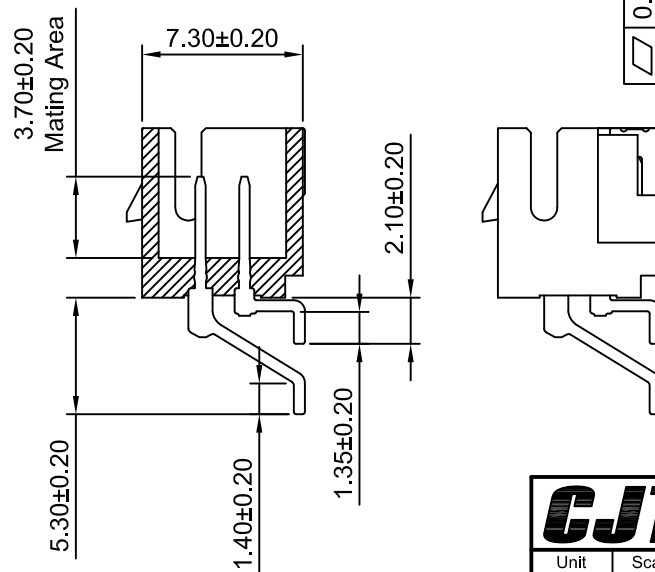

Ordering Information:

A2008WR-S1-2xXP - **
1 2

1.Part NO.

2.Finish:

(blank): Tin over Nickel

G: Gold over Nickel (Au:1u")

G15: Gold over Nickel (Au:15u", Mating Area)

G30: Gold over Nickel (Au:30u", Mating Area)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 1000V AC/minute

PIN Material: Brass/Tin over Nickel

Material: Nylon 9T UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2008WR-S1-2x2P	2.00	6.00
A2008WR-S1-2x3P	4.00	8.00
A2008WR-S1-2x4P	6.00	10.00
A2008WR-S1-2x5P	8.00	12.00
A2008WR-S1-2x6P	10.00	14.00
A2008WR-S1-2x7P	12.00	16.00
A2008WR-S1-2x8P	14.00	18.00
A2008WR-S1-2x9P	16.00	20.00
A2008WR-S1-2x10P	18.00	22.00
A2008WR-S1-2x11P	20.00	24.00
A2008WR-S1-2x12P	22.00	26.00
A2008WR-S1-2x13P	24.00	28.00
A2008WR-S1-2x14P	26.00	30.00
A2008WR-S1-2x15P	28.00	32.00
A2008WR-S1-2x16P	30.00	34.00
A2008WR-S1-2x17P	32.00	36.00
A2008WR-S1-2x18P	34.00	38.00
A2008WR-S1-2x19P	36.00	40.00
A2008WR-S1-2x20P	38.00	42.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH 90° DUAL ROW WAFER - SMD TYPE	
DRWN	CHKD	APPR	DRAWING NO.	
Dengchun Yi	Diankui Wan	Jack Yin	A2008WR-S1-2xXP	
General Tolerances			THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			REV A1	

A1	CHANGE THE TOLERANCE	2020.06.28
A0	NEW RELEASE	2020.06.17
REV	DESCRIPTION	DATE