
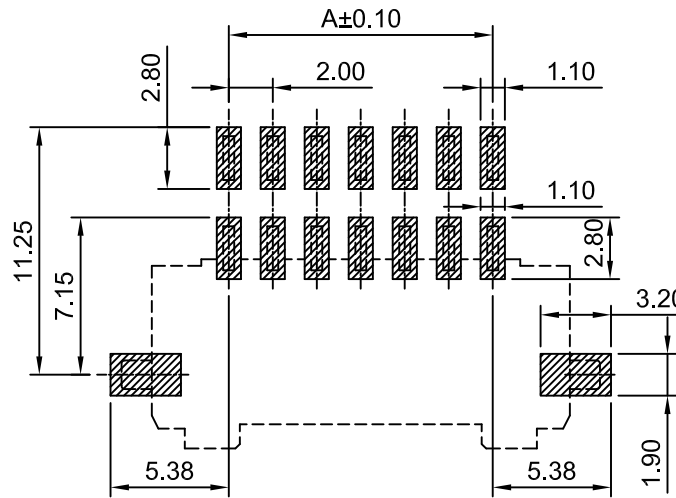


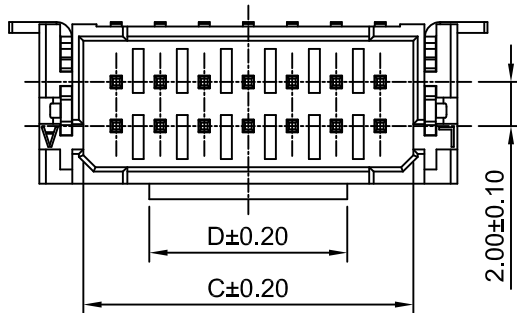

P.C.B LAYOUT
TOLERANCE:±0.05

Ordering Information:

A2008WR-S2-2xXP - **
1 2

1.Part NO.

2.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel(Au:1µin[0.03µm] Min)

G15: Gold over Nickel(Au:15µin[0.38µm] Min,Mating Area)

G30: Gold over Nickel(Au:30µin[0.76µm] Min,Mating Area)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max.

Insulation Resistance: 1000MΩ Min.





Withstanding Voltage: 1000V AC/minute

PIN Material: Brass

Material: LCP, UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2008WR-S2-2x2P	2.00	9.00	5.00	3.00
A2008WR-S2-2x3P	4.00	11.00	7.00	3.00
A2008WR-S2-2x4P	6.00	13.00	9.00	3.00
A2008WR-S2-2x5P	8.00	15.00	11.00	5.00
A2008WR-S2-2x6P	10.00	17.00	13.00	7.00
A2008WR-S2-2x7P	12.00	19.00	15.00	9.00
A2008WR-S2-2x8P	14.00	21.00	17.00	11.00
A2008WR-S2-2x9P	16.00	23.00	19.00	13.00
A2008WR-S2-2x10P	18.00	25.00	21.00	15.00
A2008WR-S2-2x11P	20.00	27.00	23.00	17.00
A2008WR-S2-2x12P	22.00	29.00	25.00	19.00
A2008WR-S2-2x13P	24.00	31.00	27.00	21.00
A2008WR-S2-2x14P	26.00	33.00	29.00	23.00
A2008WR-S2-2x15P	28.00	35.00	31.00	25.00
A2008WR-S2-2x16P	30.00	37.00	33.00	27.00

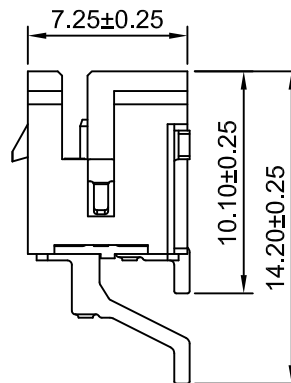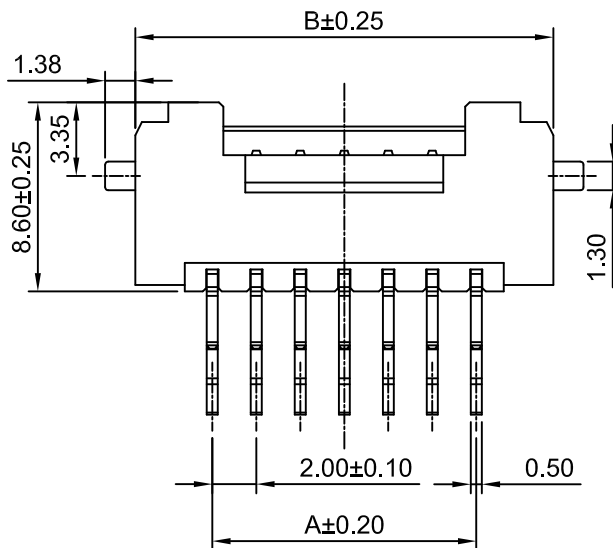

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit Scale Sheet

mm 3:1 1 of 1

DRAWN CHK'D APPR

Haisen Li Diankui Wan Jack Yin

General Tolerances

x.xx±0.25
x.xxx±0.20
x.xxxx±0.15

ANGLES ±1°

THIRD ANGLE
PROJECTION



TITLE

2.00mm PITCH

RIGHT ANGLE DUAL ROW HEADER

- SMD TYPE

DRAWING NO.

A2008WR-S2-2xXP

REV A0

REV	DESCRIPTION	DATE
A0	NEW RELEASE	2022.12.13