






2P~4P



5P~10P



11P~15P

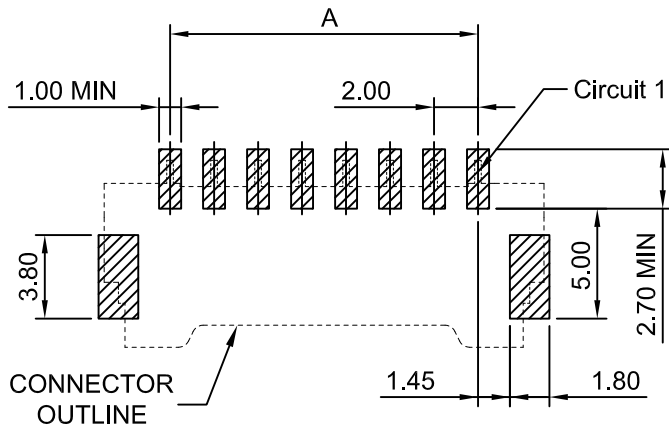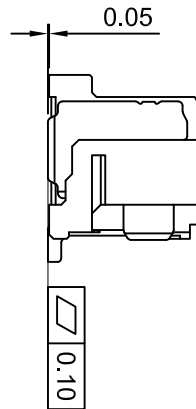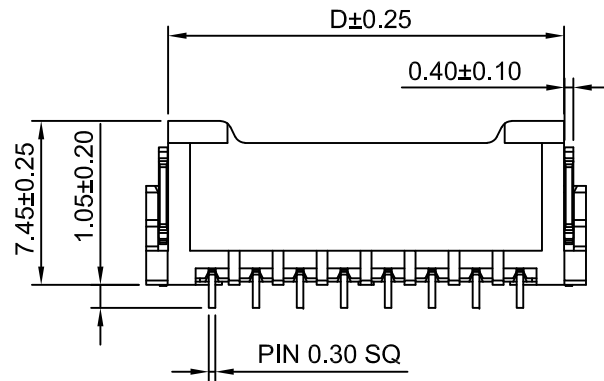

P.C.B LAYOUT(TOP VIEW)
TOLERANCE:±0.05

SPECIFICATIONS:

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance:20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 800V AC/minute
 PIN Material: Phorphos Bronze/Tin over Nickel
 Solder tabs: Brass/Tin over Nickel
 Material: Nylon 9T UL94V-0(Natural)
 Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2008WRE-S-2P	2.00	8.00	4.85	6.00
A2008WRE-S-3P	4.00	10.00	6.85	8.00
A2008WRE-S-4P	6.00	12.00	8.85	10.00
A2008WRE-S-5P	8.00	14.00	10.85	12.00
A2008WRE-S-6P	10.00	16.00	12.85	14.00
A2008WRE-S-7P	12.00	18.00	14.85	16.00
A2008WRE-S-8P	14.00	20.00	16.85	18.00
A2008WRE-S-9P	16.00	22.00	18.85	20.00
A2008WRE-S-10P	18.00	24.00	20.85	22.00
A2008WRE-S-11P	20.00	26.00	22.85	24.00
A2008WRE-S-12P	22.00	28.00	24.85	26.00
A2008WRE-S-13P	24.00	30.00	26.85	28.00
A2008WRE-S-14P	26.00	32.00	28.85	30.00
A2008WRE-S-15P	28.00	34.00	30.85	32.00

CJTconn CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE
mm	3:1	1 of 1	2.00mm PITCH RIGHT-ANGLE SINGLE ROW PIN HEADER - SMD TYPE
DRWN	CHK'D	APPR	DRAWING NO.
Xu Lei	DianKui Wan	Jack Yin	A2008WRE-S-XP
General Tolerances	THIRD ANGLE PROJECTION		REV
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°			A0
A0	NEW RELEASE	2021.12.15	
REV	DESCRIPTION	DATE	