

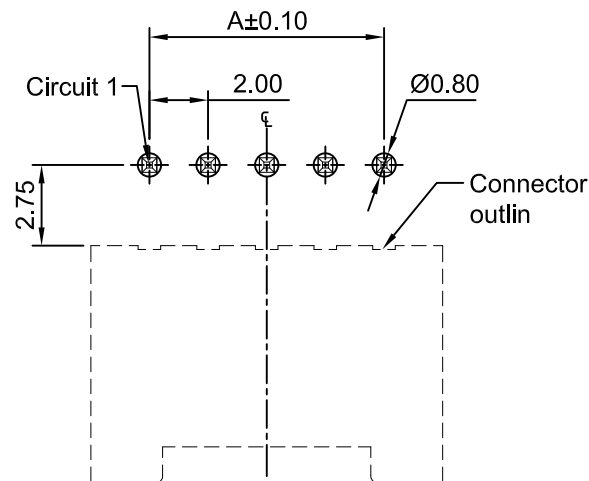
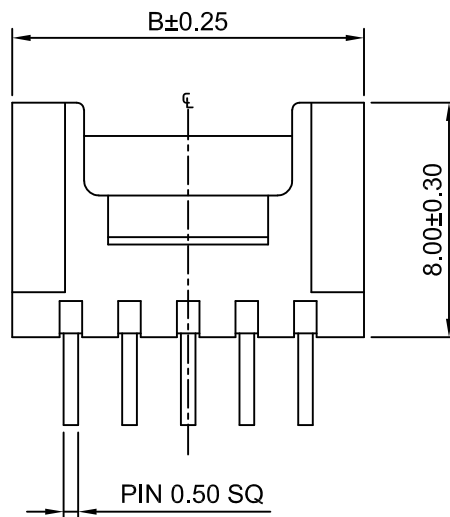


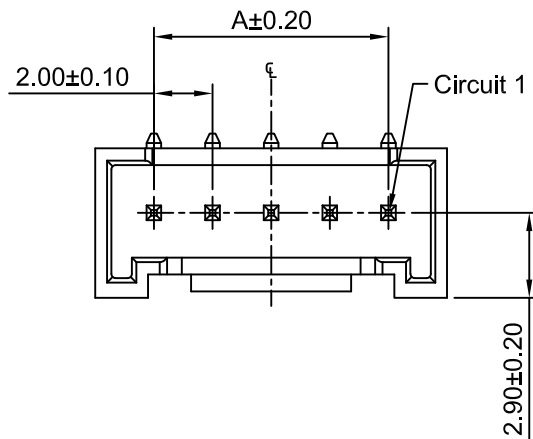

P.C.B LAYOUT (TOP VIEW)
TOLERANCE:±0.05

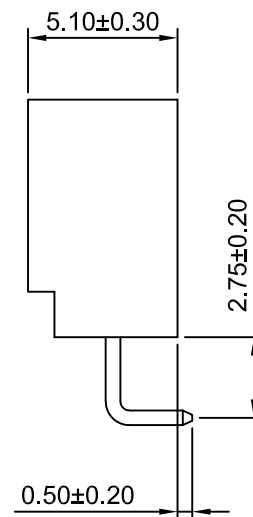

Ordering Information:
A2008WVR-XP - $\frac{***}{1} - \frac{**}{2} - \frac{**}{3} - \frac{**}{4}$

1.Part NO.

2.Material:

(Blank): Nylon 66,UL94V-0(White)

GWT: Nylon 66,UL94V-0(Beige),
IEC 60335-1,5th Edition
Glow Wire Capable.

6T: Nylon 6T,UL94V-0(Ivory)

3.Color:

(Blank): White

BK: Black BL: Blue

GN: Green GY: Gray

RD: Red YL: Yellow

4.Finish:

(Blank): Tin over Nickel

G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 30mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1000V AC/minute
Pin Material: Brass
Material: Nylon 66,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2008WVR-2P	2.00	6.00
A2008WVR-3P	4.00	8.00
A2008WVR-4P	6.00	10.00
A2008WVR-5P	8.00	12.00
A2008WVR-6P	10.00	14.00
A2008WVR-7P	12.00	16.00
A2008WVR-8P	14.00	18.00
A2008WVR-9P	16.00	20.00
A2008WVR-10P	18.00	22.00
A2008WVR-11P	20.00	24.00
A2008WVR-12P	22.00	26.00
A2008WVR-13P	24.00	28.00
A2008WVR-14P	26.00	30.00
A2008WVR-15P	28.00	32.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1		
DRWN	CHK'D	APPR	2.00mm PITCH 90° WAFER	
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2008WVR-XP	REV A0
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2021.04.21
REV	DESCRIPTION	DATE