


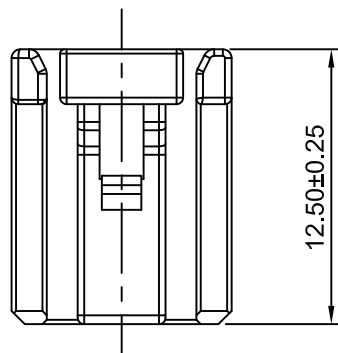


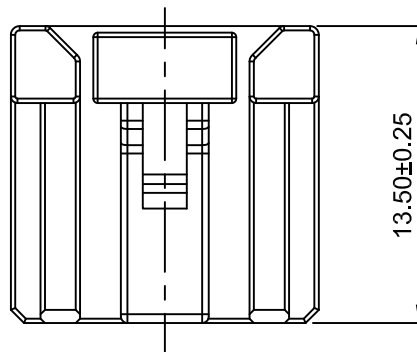

2x4P

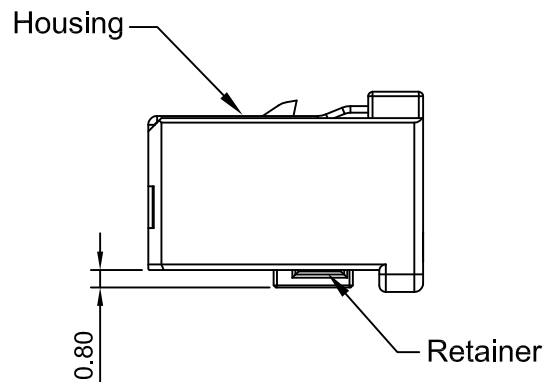

2x6P-2x12P

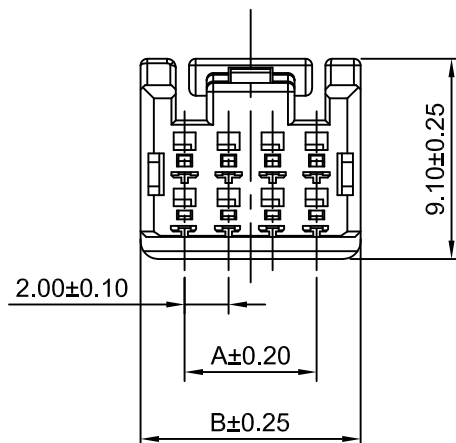

Ordering Information:

A2009HC-2xXP - ***


1 2

1.Part NO.

2.Style:

(Blank): Type 1

A: Type 2 (Just for 2x6P)



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 8mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: PBT+10%GF,UL94V-0(Black)

Retainer Material:PBT+10%GF,UL94V-0(Blue)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
A2009HC-2x4P	6.00	10.00
A2009HC-2x6P	10.00	14.00
A2009HC-2x12P	22.00	26.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 2		
DRAWN	CHK'D	APPR	2.00mm PITCH HOUSING	
Haisen Li	Djankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO. A2009HC-2xXP	
x,xx±0.25 x,xxx±0.20 x,xxxx±0.15 ANGLES ±1°				
A0			REV A0	
NEW RELEASE				
REV	DESCRIPTION	DATE		