
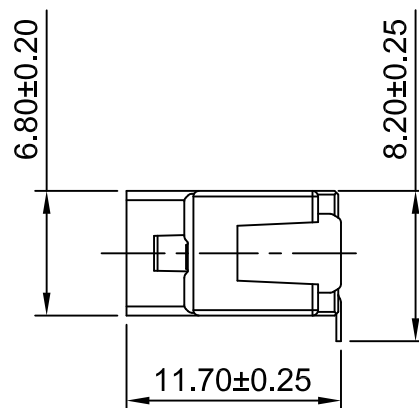
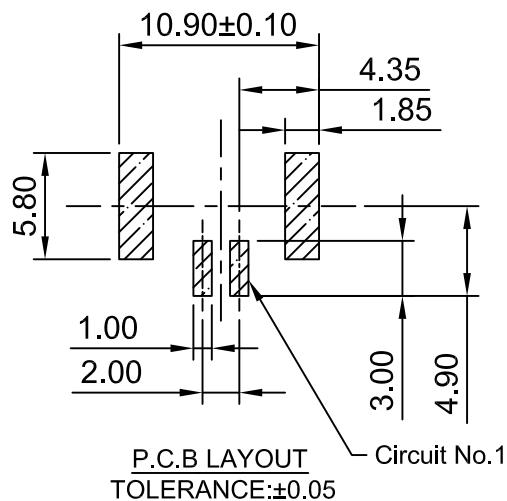
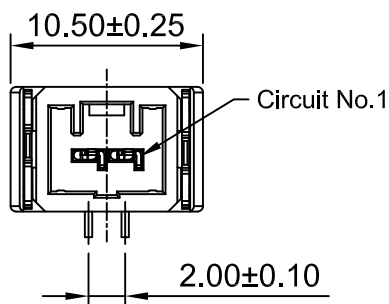




Odering Information:

A2009WVC-S-2P - ***

1 2

1.Part NO.

2.Finish:

(Blank):Gold over Nickel(Au:1μin[0.03μm] Min)

G15:Gold over Nickel(Au:15μin[0.38μm] Min,Mating Area)

G30:Gold over Nickel(Au:30μin[0.76μm] Min,Mating Area)

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 50V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 8mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material: Copper Alloy

Solder tabs: Brass/Tin over Nickel

Material: LCP+30%GF,UL94V-0(Black)

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	2.5:1	1 of 1	2.00mm PITCH VERTICAL SINGLE ROW WAFER -SMD TYPE	
DRAWN	CHK'D	APPR	DRAWING NO.	
Haisen Li	Djankui Wan	Jack Yin	A2009WVC-S-2P	
General Tolerances			THIRD ANGLE PROJECTION	REV A0
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°				

A0	NEW RELEASE	2023.04.17
REV	DESCRIPTION	DATE