
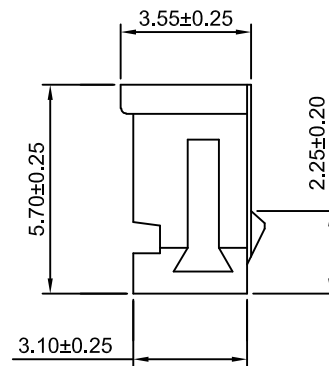
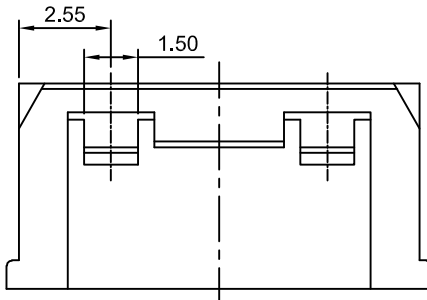
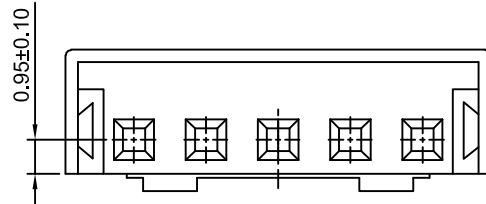
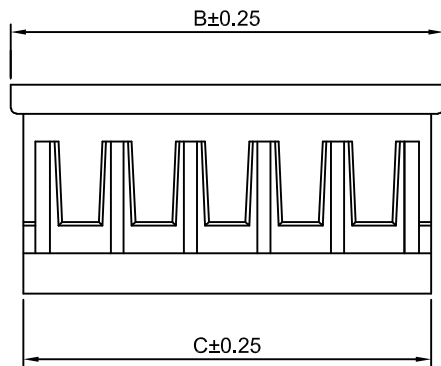
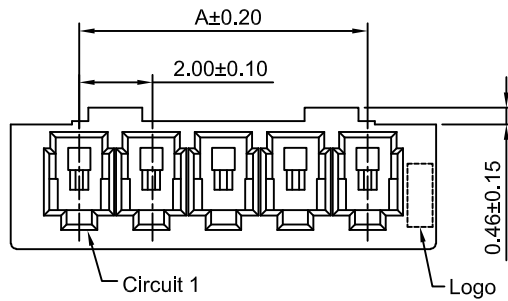


SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		
	A	B	C
A2010H-2P	2.00	5.80	5.10
A2010H-3P	4.00	7.80	7.10
A2010H-4P	6.00	9.80	9.10
A2010H-5P	8.00	11.80	11.10
A2010H-6P	10.00	13.80	13.10
A2010H-7P	12.00	15.80	15.10
A2010H-8P	14.00	17.80	17.10
A2010H-9P	16.00	19.80	19.10
A2010H-10P	18.00	21.80	21.10
A2010H-11P	20.00	23.80	23.10
A2010H-12P	22.00	25.80	25.10
A2010H-13P	24.00	27.80	27.10
A2010H-14P	26.00	29.80	29.10
A2010H-15P	28.00	31.80	31.10

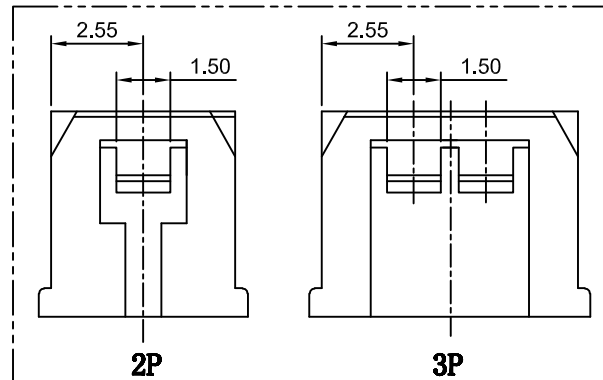

A1	CHANGE THE DRAWING	2021.02.21
A0	NEW RELEASE	2009.05.10
REV	DESCRIPTION	DATE

CJTconn CHANGJIANG CONNECTORS CO.,LTD.			
Unit	Scale	Sheet	TITLE
mm	5:1	1 of 1	2.00mm PITCH
DRAWN	CHK'D	APPR	HOUSING
Haisen Li	Djankui Wan	Jack Yin	
General Tolerances		THIRD ANGLE PROJECTION	
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°			
DRAWING NO.			REV
A2010H-XP			A1