
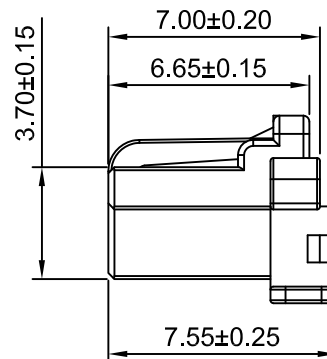
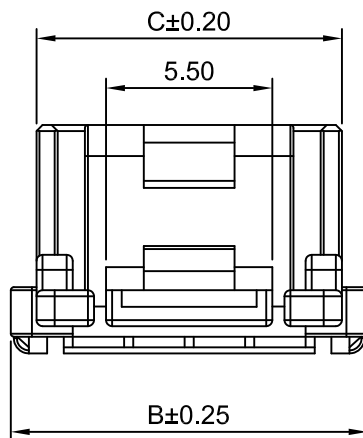
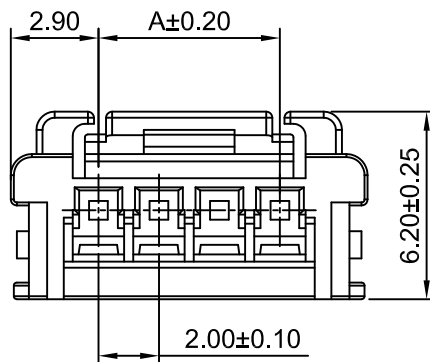


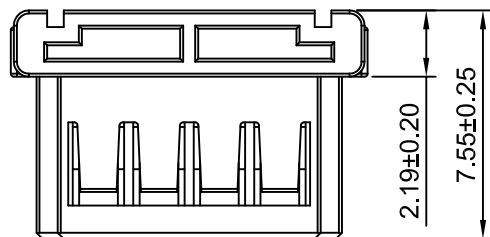

Ordering Information:


A2010HB-XP - ^{**}/₂

1.Part NO.

4.Color:

(Blank): White

BK: Black



SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Material: Nylon 66,UL94V-0(White)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			Part NO.	Dimensions(mm)		
	A	B	C		A	B	C
2P	2.00	7.80	6.10	9P	16.00	21.80	20.10
3P	4.00	9.80	8.10	10P	18.00	23.80	22.10
4P	6.00	11.80	10.10	11P	20.00	25.80	24.10
5P	8.00	13.80	12.10	12P	22.00	27.80	26.10
6P	10.00	15.80	14.10	13P	24.00	29.80	28.10
7P	12.00	17.80	16.10	14P	26.00	31.80	30.10
8P	14.00	19.80	18.10	15P	28.00	33.80	32.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	4:1	1 of 1	2.00mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin		
General Tolerances		THIRD ANGLE PROJECTION	DRAWING NO.	REV
x,x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			A2010HB-XP	A1

A1	MODIFY DRAWING	2022.08.02
A0	NEW RELEASE	2020.05.10
REV	DESCRIPTION	DATE