


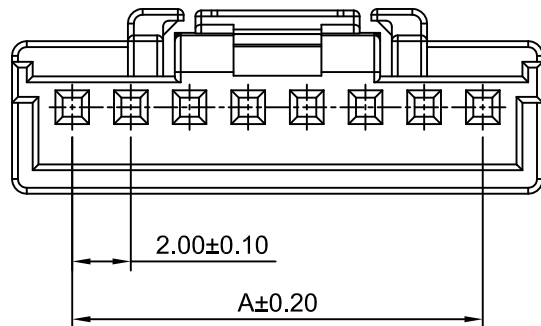
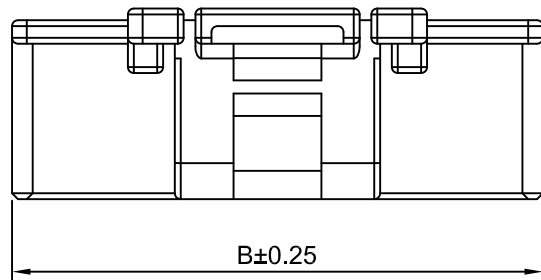






5~15P

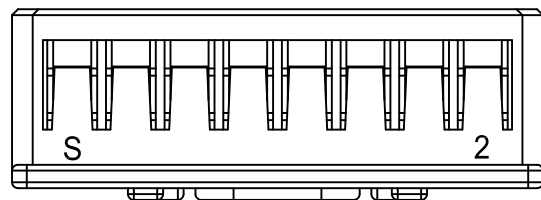

4P~3P



2P

Ordering Information:

A2010HC-NP - ***
1 2

1.Part No.

2.Material & Color:

(Blank): PBT,UL94V-0(Natural)

HF: Nylon 66,UL94V-0,Halogen Free(Natural)

3.Color:

(Blank): Natural

BK: Black

RD: Red

BL: Blue

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 500V AC/minute

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	8.00	9P	16.00	20.10
3P	4.00	8.10	10P	18.00	22.10
4P	6.00	10.10	11P	20.00	24.10
5P	8.00	12.10	12P	22.00	26.10
6P	10.00	14.10	13P	24.00	28.10
7P	12.00	16.10	14P	26.00	30.10
8P	14.00	18.10	15P	28.00	32.10

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE	
mm		4:1		1 of 1			
DRWN		CHK'D		APPR			
Wenmin Luo		Diankui Wan		Jack Yin		2.00mm Pitch Housing	
General Tolerances		THIRD ANGLE PROJECTION		DRAWING NO.			
x.xx±0.25						A2010HC-NP	
x.xx±0.20							
x.xx±0.15							
ANGLES ±1°				REV			
				A1			

x.x±0.25
x.xxx±0.20
x.xxxx±0.15
ANGLES ±1°

