

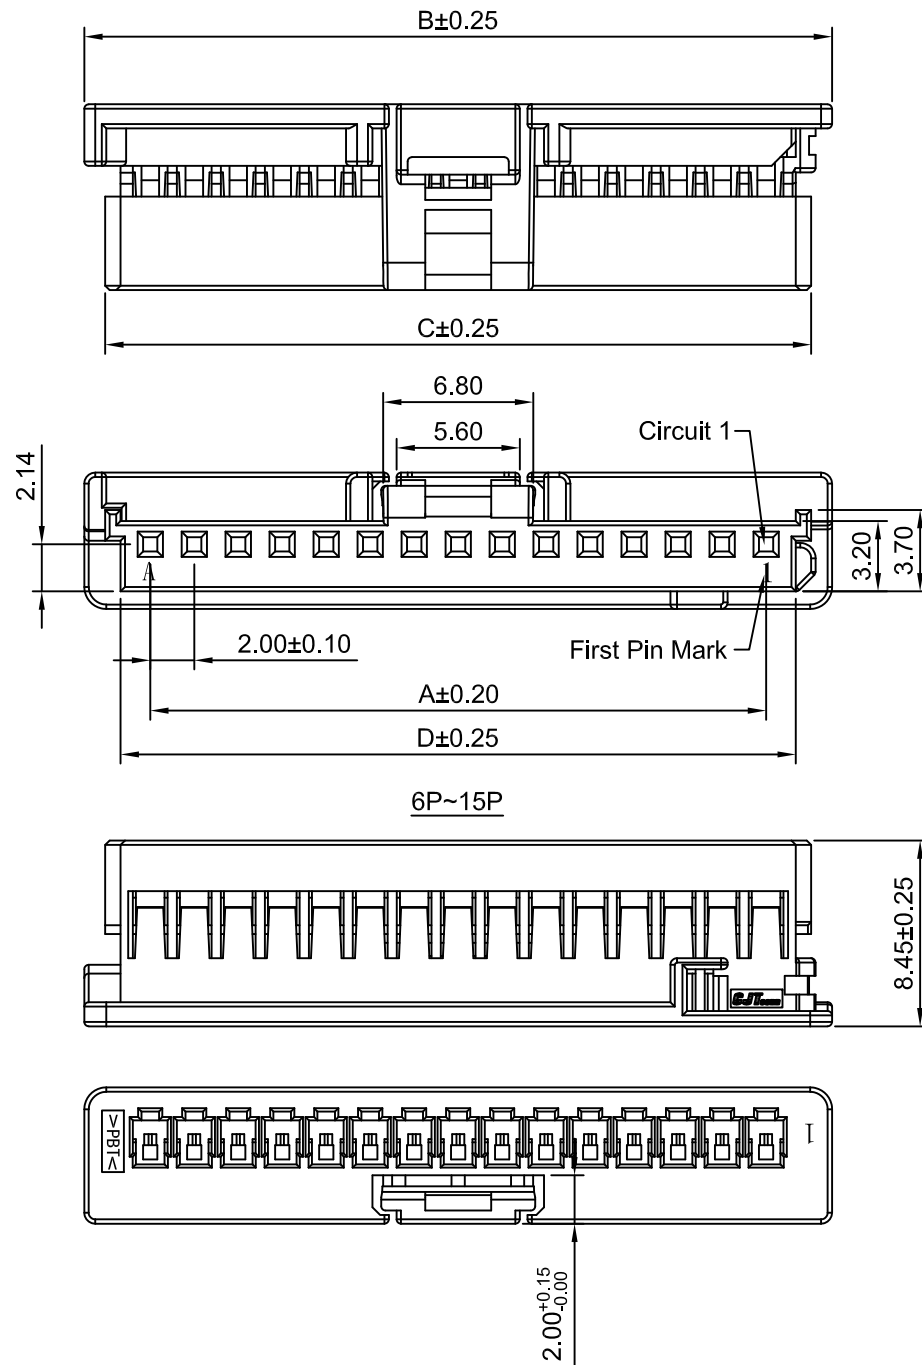



2P



3P



4P~5P



6P~15P

Ordering Information:

A2010HD-XP - ***
1 2

1.Part NO.

2.Color:

(Blank): White

BK: Black

RD: Red

BL: Blue

SPECIFICATIONS:

Current Rating: 6A AC,DC (MAX)

Voltage Rating: 125V AC,DC

Temperature Range: -40°C ~ +125°C

Contact Resistance: 10mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: PBT,UL94V-0

Ordering Information & Dimensions

Part NO.	Dimensions(mm)			
	A	B	C	D
A2010HD-2P	2.00	8.00	6.10	4.70
A2010HD-3P	4.00	10.00	8.10	6.70
A2010HD-4P	6.00	12.00	10.10	8.70
A2010HD-5P	8.00	14.00	12.10	10.70
A2010HD-6P	10.00	16.00	14.10	12.70
A2010HD-7P	12.00	18.00	16.10	14.70
A2010HD-8P	14.00	20.00	18.10	16.70
A2010HD-9P	16.00	22.00	20.10	18.70
A2010HD-10P	18.00	24.00	22.10	20.70
A2010HD-11P	20.00	26.00	24.10	22.70
A2010HD-12P	22.00	28.00	26.10	24.70
A2010HD-13P	24.00	30.00	28.10	26.70
A2010HD-14P	26.00	32.00	30.10	28.70
A2010HD-15P	28.00	34.00	32.10	30.70

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE	
mm	3:1	1 of 1	2.00mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Wenmin Luo	Diankui Wan	Jack Yin	DRAWING NO.	
General Tolerances			THIRD ANGLE PROJECTION	
x,x±0.25 x,x,x±0.20 x,x,x,x±0.15 ANGLES ±1°			A2010HD-XP	
REV			REV A3	

A3	CHANGE THE DRAWING	2022.03.22
A2	CHANGE THE DRAWING	2021.12.18
A1	MODIFY DRAWING	2021.05.10
A0	NEW RELEASE	2020.08.18
REV	DESCRIPTION	DATE