

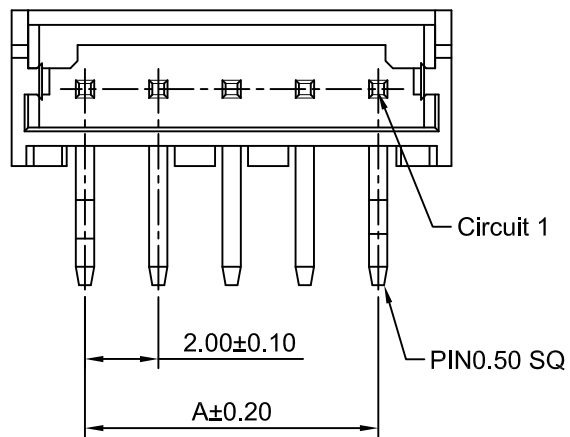
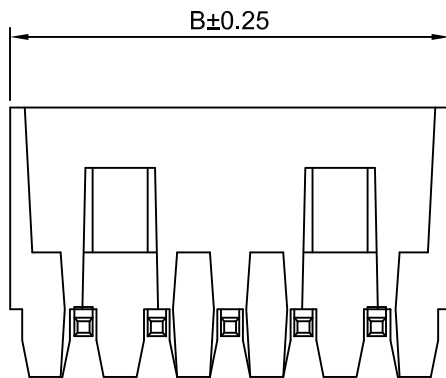



P.C.B LAYOUT



4P~15P

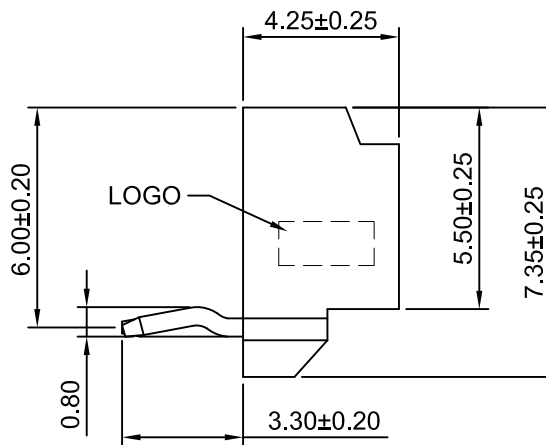

3P



2P

SPECIFICATIONS:

Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin over Nickel
Material: Nylon 66+30%GF,UL94V-0(Natural)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.00	6.00	11P	20.00	24.00
3P	4.00	8.00	12P	22.00	26.00
4P	6.00	10.00	13P	24.00	28.00
5P	8.00	12.00	14P	26.00	30.00
6P	10.00	14.00	15P	28.00	32.00
7P	12.00	16.00	16P	30.00	34.00
8P	14.00	18.00	17P	32.00	36.00
9P	16.00	20.00	18P	34.00	38.00
10P	18.00	22.00			

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet	TITLE		
mm	5:1	1 of 1	2.00mm PITCH Right-Angle WAFER		
DRAWN	CHK'D	APPR			
Chengbiao Ye	Diankui Wan	Jack Yin	DRAWING NO.		
General Tolerances			A2010WR-XP		
THIRD ANGLE PROJECTION			REV A2		

A2	CHANGE THE DRAWING	2023.01.30
A1	CHANGE THE DRAWING	2021.02.01
A0	NEW RELEASE	2020.08.01
REV	DESCRIPTION	DATE

x.x±0.25
x.xx±0.20
x.xxx±0.15
ANGLES ±1°

