

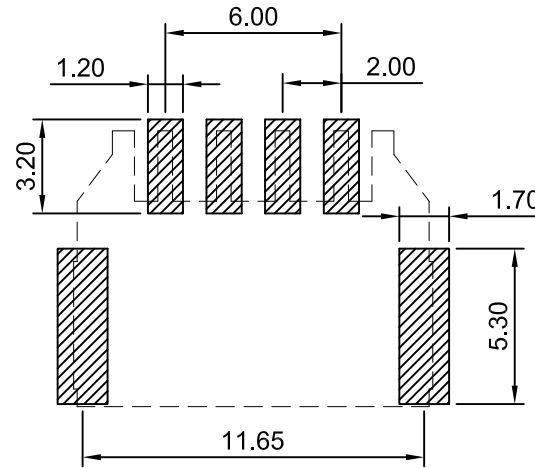
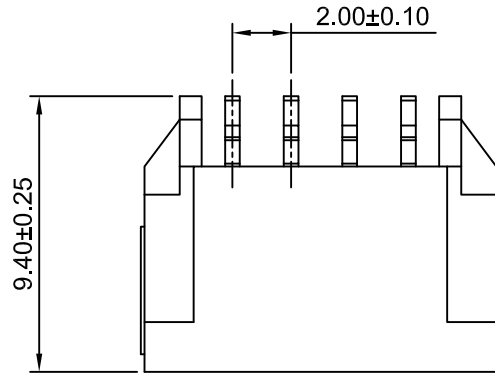
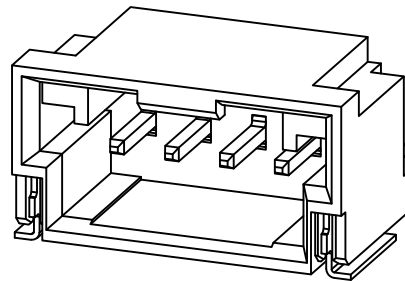
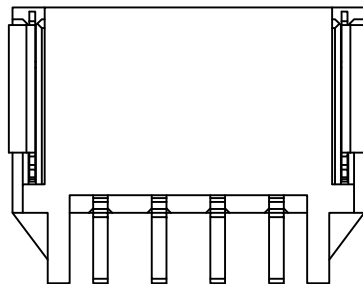


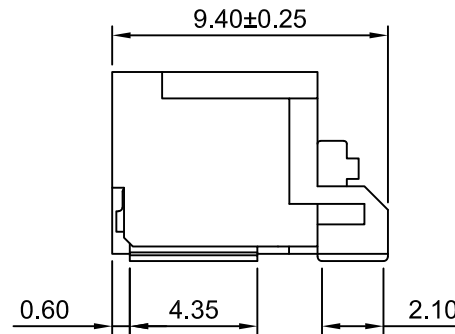

P.C.B LAYOUT
TOLERANCE:±0.05

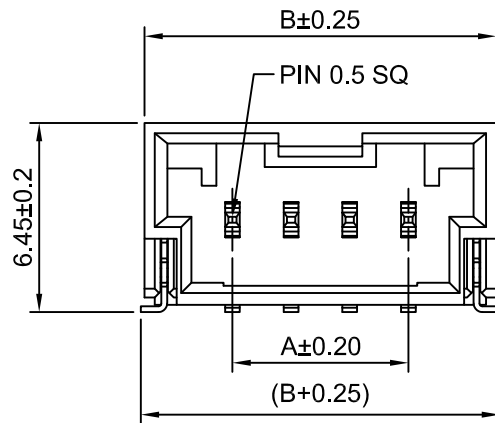

Ordering Information:

A2010WRB-S-XP - ***

1 2

1.Part NO.

2.Finish:

(Blank):Gold over Nickel (Au:1u")

T:Tin over Nickel

SPECIFICATIONS:

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Temperature Range: -40°C ~ +105°C

Contact Resistance: 30mΩ Max

Insulation Resistance: 1000MΩ Min

Withstanding Voltage: 1000V AC/minute

Pin Material:Brass

Material: Nylon 6T,UL94V-0(Beige)

Ordering Information & Dimensions

Part NO.	Dimensions(mm)		Part NO.	Dimensions(mm)	
	A	C		A	C
2P	2.00	8.00	9P	16.00	22.00
3P	4.00	10.00	10P	18.00	24.00
4P	6.00	12.00	11P	20.00	26.00
5P	8.00	14.00	12P	22.00	28.00
6P	10.00	16.00	13P	24.00	30.00
7P	12.00	18.00	14P	26.00	32.00
8P	14.00	20.00	15P	28.00	34.00

CJTconn

CHANGJIANG CONNECTORS CO.,LTD.

Unit		Scale		Sheet		TITLE 2.00mm PITCH RIGHT-ANGLE DUAL ROW WAFER - SMD TYPE	
mm		4:1		1 of 1			
DRWN		CHK'D		APPR			
Wenmin Luo		Diankui Wan		Jack Yin		DRAWING NO. A2010WRB-S-XP	
General Tolerances				THIRD ANGLE PROJECTION			
x.xx±0.25 x.xxx±0.20 x.xxx±0.15 ANGLES ±1°							
0						REV A0	